


"QUALITY PUMPS SINCE 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

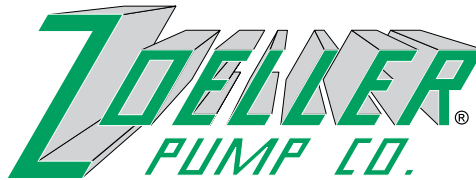

SECTION: 2.10.030  
FM2058  
0909  
Supersedes  
0906

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961  
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
[www.zoeller.com](http://www.zoeller.com)

## COMPARE THESE FEATURES

- 115 Volts single phase/60 Hz or 12 Volts DC.
- Self-priming 7 feet or less above liquid source (311 only).
- Lifts water from 15 feet below pumping level.
- Garden hose connections.
- Use to remove water from:
  - ✓ waterbeds      ✓ washing machines
  - ✓ water heaters
- Use to add propylene glycol anti-freeze to radiant heating lines.
- Maximum temperature for dewatering- 130°F (54°C).
- 90 days limited warranty.

### Model 310

- Transfers up to 300 gallons per hour.
- Includes extra impeller, gasket and one 6 ft. hose with strainer.
- 6 ft. leads with battery clips for easy use.

### Model 311

- Transfers up to 337 gallons per hour.
- Includes extra impeller, gasket and one 6 ft. hose with strainer.
- 6 ft. power cord.

Model Number	Voltage	Max. Flow 1' Head	Shut-off Head
310-0005	12VDC	300 GPH	31'
311-0002	115VAC	337 GPH	39'

Replacement Impeller/Gasket Kit P/N 015391

## Models 310 and 311

# "MIGHTY MOVER"

### PORTABLE NON-SUBMERSIBLE UTILITY PUMP FOR DEWATERING

Model 310

Product may not be exactly as pictured.

Model 311

Product may not be exactly as pictured.

Tested to UL Standard UL778 and Certified to CSA Standard C22.2 No. 108

\*Model 311 only.

## COMPARE THESE FEATURES

- Cast Iron pump housing for long life
- Engineered Thermo Plastic Impeller designed for durability
- 115V, 1/2 HP motor
- Use for removing water from water heaters, power washing, water transfer and adding propylene glycol anti-freeze to radiant heating lines
- Handle on prime plug allows for easy priming - no tools required
- Permanently lubricated ball bearings
- Carbon ceramic shaft seal
- 20 ft. power cord
- On/Off switch on motor housing
- Includes 3/4" NPT brass, lead free garden hose adapters, suction screen and extra set of brushes
- Maximum temperature for dewatering- 120°F (49°C).
- One-year limited warranty

**NEW!**

**Model 314**

# The "High Capacity" Water Mover


**PORTABLE NON-SUBMERSIBLE UTILITY PUMP  
FOR  
DEWATERING**



Certified to CSA  
Standard C22.2 No. 108

Product may not be exactly as pictured.

**"High Capacity" Water Mover  
Pump Performance Curve**

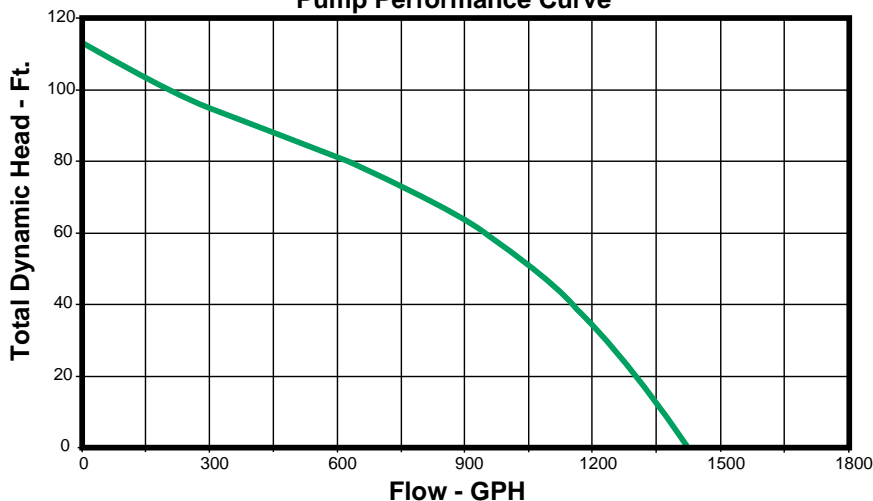

IL0153