

## COMPARE THESE FEATURES

- Cast Iron pump housing for long life
- Engineered Thermo Plastic Impeller designed for durability
- 115V, 1/2 HP motor
- Use for removing water from water heaters, power washing, water transfer and adding propylene glycol anti-freeze to radiant heating lines
- Handle on prime plug allows for easy priming - no tools required
- Permanently lubricated ball bearings
- Carbon ceramic shaft seal
- 20 ft. power cord
- On/Off switch on motor housing
- Includes 3/4" NPT brass, lead free garden hose adapters, suction screen and extra set of brushes
- Maximum temperature for dewatering- 120°F (49°C).
- One-year limited warranty

**NEW!**

**Model 314**

# The "High Capacity" Water Mover


**PORTABLE NON-SUBMERSIBLE UTILITY PUMP  
FOR  
DEWATERING**



Certified to CSA  
Standard C22.2 No. 108

Product may not be exactly as pictured.

**"High Capacity" Water Mover  
Pump Performance Curve**

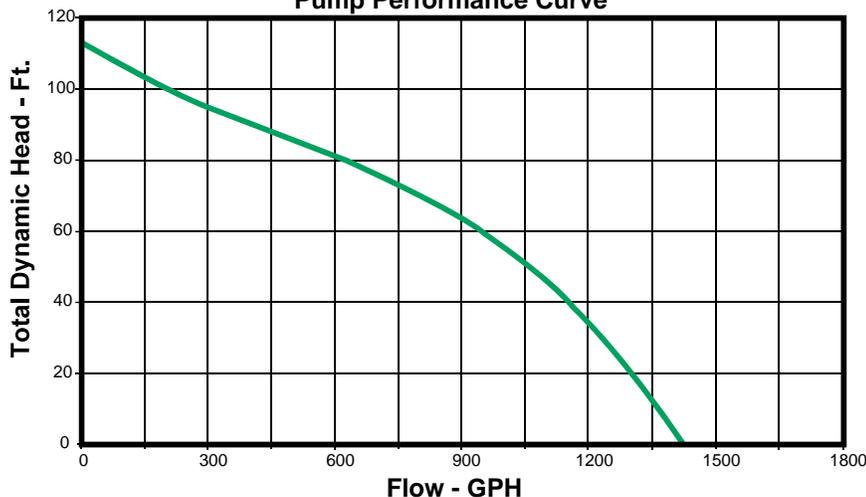

IL0153