


"QUALITY PUMPS SINCE 1939"

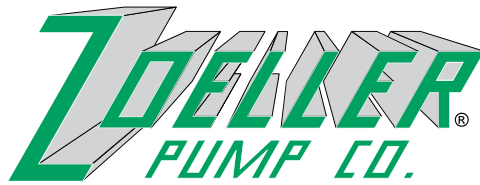

SECTION: 2.50.007

FM2465

0108

Supersedes

New

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961  
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
[www.zoeller.com](http://www.zoeller.com)

# THE SHARK Series

## 932 REPLACEMENT ASSEMBLY


### SIMPLEX REPLACEMENT GRINDER FOR POSITIVE DISPLACEMENT GRINDERS



#### E810 PROGRESSING CAVITY GRINDER PUMP

#### FEATURES:

- Readily Adapts to Existing Progressing Cavity Grinder Pump Systems.
- Quick-disconnect Coupling.
- Model 810 pump is cCSAus listed.
- Finned Class 30 Cast Iron Construction.
- Corrosion Resistant Powder Coated Epoxy Finish.
- Discharge Size - 1 1/4" NPT.
- 1 HP, 60 Hz, 1725 RPM, 230 Volts/1 Ph.
- 20' Electrical Cords with Quick Disconnect Receptacle Fitting.
- Oil-Filled - Hermetically Sealed Motor with Class B Windings.
- Hardened Stainless Steel Cutter and Disc, Rockwell C55-60.
- Stainless Steel Hydraulic Pump Rotor.
- Pressure Relief Valve. • Check Valve. • Anti-siphon Device.
- Upper and Lower Ball Bearing Construction.
- Carbon/Ceramic mechanical seal.
- Integral Thermal Overload Protection with Automatic Reset.
- Pump Control and High Water Alarm Switch.

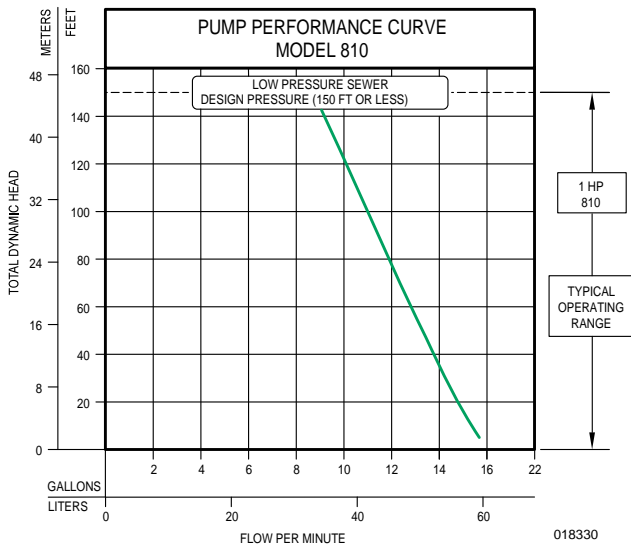

Product may not be exactly as pictured.

#### SIMPLEX REPLACEMENT GRINDER

##### 810 GRINDER • 1 HP, 1 1/4" N.P.T.

Assembly Part Number	Assembly Weight	Pump Part Number	Pump Weight	Model	Volts	Ph	Amp
932-0011	138 lbs.	810-0006	88 lbs.	E810	230	1	6.0