


"QUALITY PUMPS SINCE 1939"

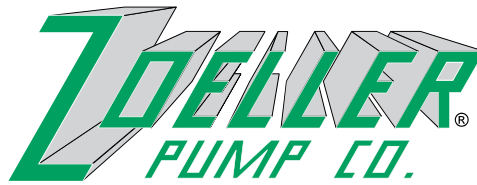

SECTION: 2.50.030

FM1563

1106

Supersedes

0803

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.


MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

THE SHARK Series 820 GRINDER PUMP

FEATURES:

- Rust Resistant Steel Cover (Epoxy Coated)
- 2 HP, 60 Hz, 1 Ph, 3450 RPM, Automatic Grinder Pump with Integral Control. (See FM1478)
- Upper and Lower Ball Bearings
- Corrosion resistant powder coated epoxy finish
- 1 1/4" NPT Galvanized Piping
- 1 1/4" Cast Iron Check Valve
- 1 1/4" Rubber Discharge Pipe Seal.
- Grinder Control Float factory set to match pressure collector system "ON" level
- Adjustable Alarm Float Switch preset at factory
- Maximum operating temperature 130° F (54° C)

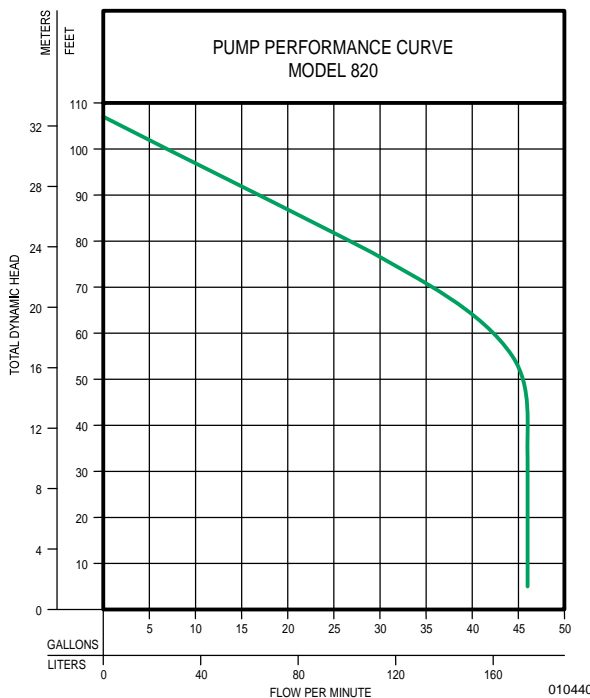

SIMPLEX REPLACEMENT GRINDER FOR POSITIVE DISPLACEMENT GRINDERS

(For Pump Pre-ix Identification see News & Views 0052)



SIMPLEX REPLACEMENT GRINDER

820 GRINDER • 2 HP, 1 1/4" N.P.T. • VERTICAL DISCHARGE								
Assembly Part Number	Assembly Weight	Pump Part Number	Pump Weight	Model	Volts	Ph	Mode	Amp
■ 932-0005	129 lbs.	820-0011	92 lbs.	WD820*	230	1	Auto	13.7
■ 932-0006	129 lbs.	820-0005	92 lbs.	WH820*	200	1	Auto	15.5
■ 932-0007	130 lbs.	820-0013	93 lbs.	WD820	230	1	Auto/Man.	13.7
■ 932-0008	130 lbs.	820-0014	93 lbs.	WH820	200	1	Auto/Man.	15.5
■ 10-1195	Adapter kit J-box assembly for pumps w/quick disconnect plug connection.							
■ 10-1196	Adapter kit discharge assembly for pumps w/gooseneck discharge.							

* WD & WH grinder pumps are completely automatic with starting controls in pump switch case.