


"QUALITY PUMPS SINCE 1939"

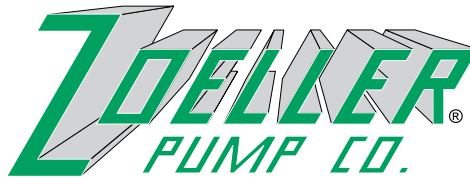

SECTION: 2.60.027

FM2459

0108

Supersedes

1007

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com



MODEL 204 LAVATORY & SHOWER SYSTEM

Economical systems designed for freestanding or built-in installation.



INSTALL A QWIK JON® ULTIMA JUST ABOUT ANYWHERE

- Contains 1/2 HP mini-grinder pump (cCSAus certified).
- Preamsembled pump and tank for easy installation.
- No need to destroy concrete floors.
- No need to elevate floor.
- Designed to accommodate a lavatory, bathtub and/or shower.
- Perfect for basements, cabins, workshops, garages, additions, pool houses, etc.
- Reduces construction cost.
- 1" discharge (can be reduced to 3/4" to replace existing systems).
- Pumps any direction.



The Qwik Jon® Ultima can be installed either freestanding or behind a wall with the 2" MPT or 1-1/2" internal slip side inlets.

These pumps are not designed for use in any other application.

TECHNICAL INFORMATION



QWIK JON® ULTIMA 204 SYSTEM INCLUDES:

Pump

- Automatic level control switch.
- Thermal overload protected motor.
- Stainless steel screws, bolts & handle.
- Non-clogging vortex impeller.
- UL Listed 3-wire neoprene 9 ft. cord & plug.
- Maximum temperature 104°F (40°C).

Tank

- Durable ABS tank w/white finish.
- Lightweight.
- Built-in check valve.

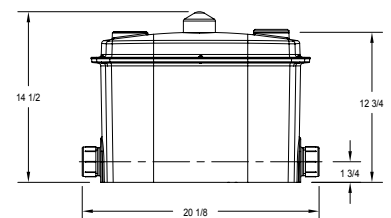

SK2674

ITEMS INCLUDED:

- Tank, lid & gasket.
- 1/2 HP mini-grinder pump.
- Back-flow device (check local codes).
- 1" Discharge & 1-1/2" Vent.
- Hardware pack.
- Installation instructions.
- Shipping weight: Model 204 - 44 lbs.

ITEMS NEEDED BY INSTALLER:

- Supply fittings & waste pipe.
- Electrical source with ground fault interrupter (GFCI) protected receptacle.
- Water supply.
- Tools.

TOTAL DYNAMIC HEAD/FLOW PER MINUTE			
FEET	METERS	GALLONS	LITERS
5	1.5	45	170
10	3.0	40	151
15	4.6	35	132
20	6.1	27	102
25	7.6	16	61
Shut-off Head - 30 ft. (9.1 meters)			

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electric Code (NEC) and the Occupational Safety and Health Act (OSHA). Must be installed per local codes.