


"QUALITY PUMPS SINCE 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

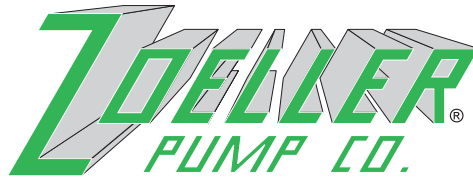

SECTION: 2.60.110

FM1606

0305

Supersedes

0903

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624


visit our web site:
www.zoeller.com


COMPARE THESE FEATURES:

- Automatically removes condensation from air conditioning and 90+ condensing furnaces, as well as:
 - ✓ Dehumidifiers
 - ✓ Ice Makers
 - ✓ Water Coolers
 - ✓ Refrigeration Systems
- Unique bearingless motor means greater reliability and longer life.
- Compact design. (10" x 5" x 4.75" height)
- 3/8" ID discharge w/check valve.
- Handles condensate up to 150°F.
- 18 ft. TDH.
- 2 quart ABS plastic reservoir.
- Available with safety switch (Model 521).
 - ✓ will automatically shut pump down in event of failure.
 - ✓ can be wired directly to appliance and/or alarm.
- 115 Volt AC, 1 phase.
- 6' power cord.
- UL Listed in US and Canada.
- 12 month limited warranty.


MODEL 520
(shown)

Multi-Purpose
CONDENSATE
Pump

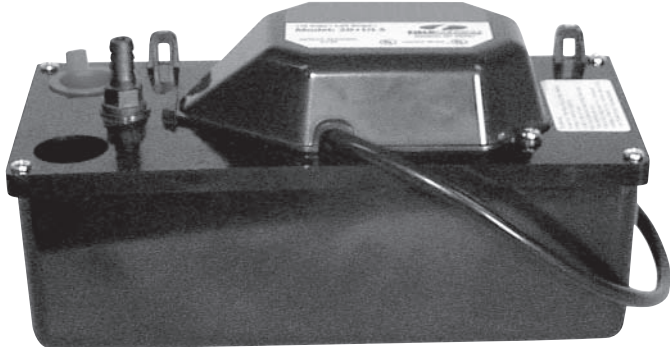




Tested to UL Standard UL778
& Certified to CSA
Standard C22.2 No. 108



Safety switch available on Model 521.

TOTAL DYNAMIC HEAD FLOW PER HOUR

MODEL		520/521	
Feet	Meters	Gal.	Liters
3	.9	76	288
6	1.8	68	257
9	2.7	60	227
12	3.7	43	163
15	4.6	21	79
Shut-off Head:		18 ft.(5.5m)	

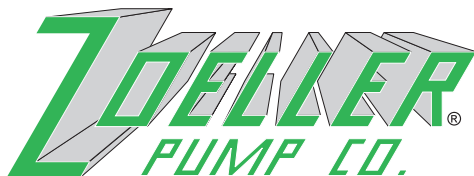

Manufacturers of . . .

"QUALITY PUMPS SINCE 1939"