


Part Number	HP	Stage	GPM at Total Pressure in PSI					▲Max Pressure PSI	=Max Pressure PSI	=Max Liquid Temperature
			15	20	25	30	40			
300-0006	1/3	1	41	30	10	—	—	27	100	200°F
301-0006	1/2	1	48	40	27	—	—	30	100	200°F
302-0006	3/4	1	62	58	46	31	—	33	100	200°F
303-0006	1	1	70	66	58	48	—	40	100	200°F
304-0006	1-1/2	1	*	75	70	61	36	44	100	200°F
305-0006	2	1	*	*	79	77	57	45	100	200°F

(▲) Shut-off. To convert to feet of head, multiply by 2.31.

(=) Do not exceed the maximum case pressure and maximum liquid temperature rating of the pump.

(\*) Operation of pump in this range may result in reduced pump life and/or motor damage.

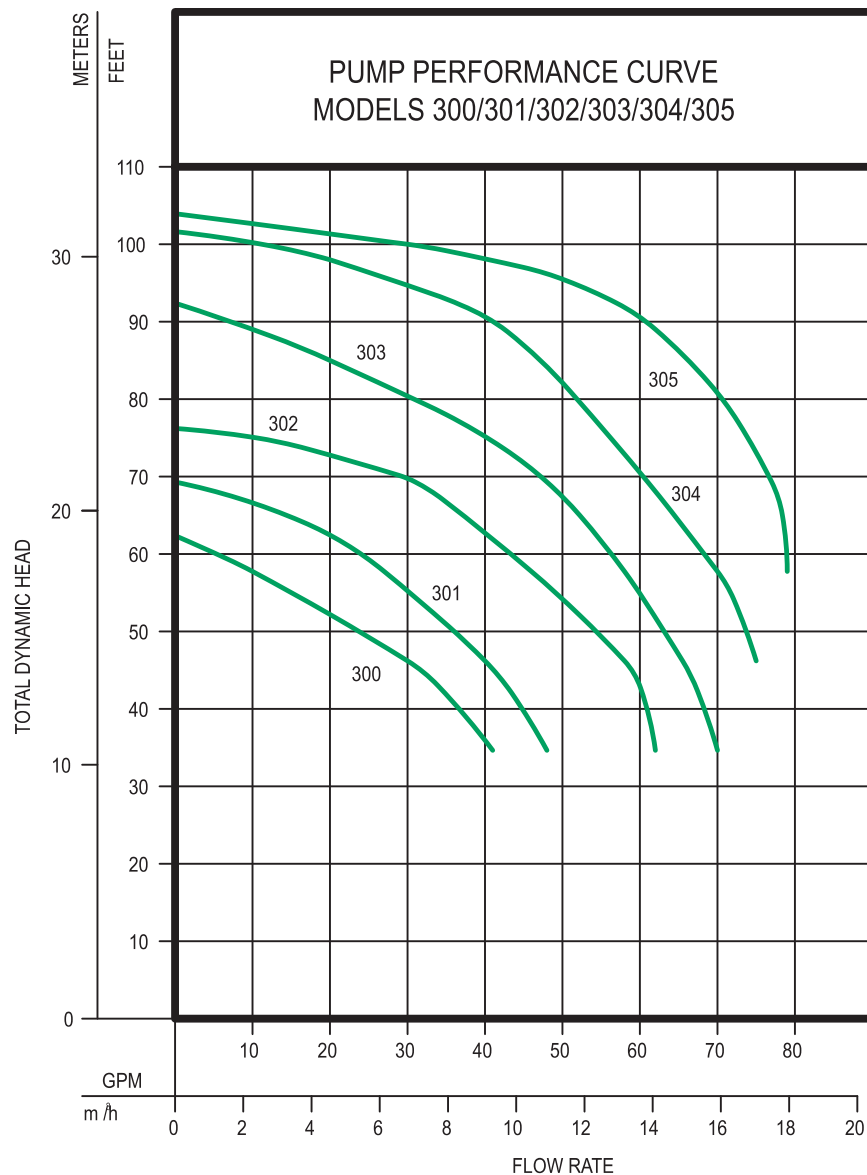

300\_305percurve

## RESERVE POWERED DESIGN

For unusual conditions a reserve safety factor is engineered into the design of every Zoeller pump.



www.zoeller.com

**ZOELLER**  
PUMP CO.

MAIL TO: P.O. BOX 16347  
Louisville, KY 40256-0347  
SHIP TO: 3649 Cane Run Road  
Louisville, KY 40211-1961  
(502) 778-2731 • 1 (800) 928-PUMP  
FAX (502) 774-3624

Manufacturers of . . .

"QUALITY PUMPS SINCE 1939"