


Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

COMPARE THESE FEATURES

- 56 frame, NEMA J, capacitor start, double ball bearing motor for continuous operation.
- 3/4, 1, 1-1/2, and 2 HP sizes with single phase motor.
- Rugged cast iron pump casing. Multi stage for high head.
- Normal wearing parts are easily removed for service and replacement without disturbing the suction or discharge piping.
- One year limited warranty.

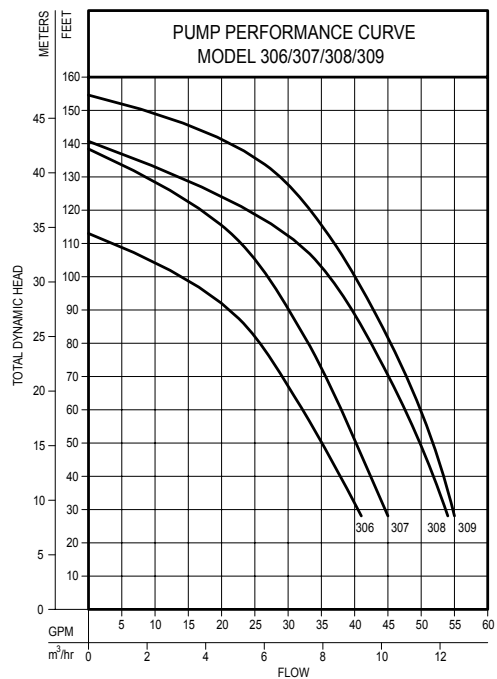

Two Stage Centrifugal Pumps



APPLICATIONS

- Booster service
- Water circulation
- Cooling systems
- Laundry equipment
- Liquid transfers

NE306 - 3/4 HP
NE307 - 1 HP
NE308 - 1-1/2 HP
NE309 - 2 HP

| MODEL NO. | HP | STAGES | SUCTION LIFT FT. | CAPACITY U.S. GPM | | | | | | | | | | | MAX. PRESS. PSI | MAX. CASE PRESS. | MAX. LIQUID TEMP. |
|-------------------|-------|--------|------------------|------------------------|----|----|----|----|----|----|----|----|--|----|-----------------|------------------|-------------------|
| | | | | DISCHARGE PRESSURE PSI | | | | | | | | | | | | | |
| 1 PHASE | | | | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | | | | | |
| NE306 306-0006 | 3/4 | 2 | 5 | 41 | 35 | 28 | 20 | | | | | | | 49 | 160psig | 160° F | |
| | | | 15 | 38 | 32 | 26 | 13 | | | | | | | | | | |
| | | | 25 | 32 | 29 | 22 | | | | | | | | | | | |
| NE307 307-0006 | 1 | 2 | 5 | 45 | 40 | 35 | 28 | 20 | | | | | | 60 | 160psig | 160° F | |
| | | | 15 | 42 | 39 | 33 | 26 | 15 | | | | | | | | | |
| | | | 25 | 35 | 33 | 30 | 22 | | | | | | | | | | |
| NE308 308-0006 | 1 1/2 | 2 | 5 | 54 | 50 | 44 | 38 | 28 | | | | | | 61 | 160psig | 160° F | |
| | | | 15 | 48 | 46 | 42 | 35 | 23 | | | | | | | | | |
| | | | 25 | 37 | 35 | 33 | 28 | 17 | | | | | | | | | |
| NE309 309-0005 | 2 | 2 | 5 | 55 | 52 | 47 | 41 | 34 | 23 | | | | | 67 | 160psig | 160° F | |
| | | | 15 | 49 | 47 | 45 | 39 | 30 | 17 | | | | | | | | |
| | | | 25 | 37 | 36 | 33 | 32 | 26 | | | | | | | | | |

▲Do not exceed the maximum case pressure and maximum liquid temperature rating of the pump
Suction and Discharge Tappings 1-1/2" X 1-1/4"