


“QUALITY PUMPS SINCE 1939”

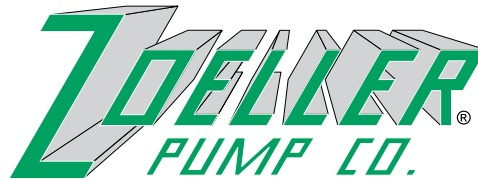

SECTION: 3.10.010

FM0454

0507

Supersedes

0805

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961  
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
[www.zoeller.com](http://www.zoeller.com)

## 910 SEWAGE SYSTEMS



Model 10-1494 shown.



**OPTIONS:** Zoeller recommends a High Water Alarm for added protection. See FM0732 for available models

### 910 - SIMPLEX & DUPLEX SEWAGE PACKAGE SYSTEMS (UNASSEMBLED)

Ideal for homes, farms, trailer courts, motels, restaurants and institutions where drain facilities are below existing sewer lines. Maximum Temperature rated at 130°F (54°C).

Model Number	Pump	Volts	Basin & Cover	Unicheck	Weight
910-0005*	M267	115V	Poly-Foam-18X30-2V2D	2" C.I.	77
910-0006*	D267	230V	Poly-Foam-18X30-2V2D	2" C.I.	77
910-0007*	M267	115V	Poly-Foam-18X30-3V2D	2" C.I.	77
910-0008*	D267	230V	Poly-Foam-18X30-3V2D	2" C.I.	77
910-0009†	M267	115V	Fiberglass-18X30-2V2D	2" C.I.	88
910-0016	M267	115V	Poly-18X30-2V2D	2" C.I.	83
910-0017*	M268	115V	Poly-Foam-18X30-3V3D	3" C.I.	92
910-0018*	M267	115V	Poly-18X30-2V2D	2" C.I.	82
910-0023	BN264	115V	Poly-18X30-2V2D	2" PVC	62
910-0024	BN267	115V	Poly-18X30-2V2D	2" PVC	76
910-0026	BN267	115V	Poly-Foam-18X30-2V2D	2" PVC	76
910-0030**	M264	115V	Duplex Poly-Foam-30X36-2V2D	2" Tri-check®	156
910-0031**	M267	115V	Duplex Poly-Foam-30X36-2V2D	2" Tri-check®	178

#### BASINS -

Polyethylene Structural Foam, Polyethylene or Fiberglass.

\*Split poly cover.


†Split steel cover.

\*\*Duplex System is complete with (2) automatic pumps, (1) Smart Pak Plus residential alternator, (1) 30" x 36" duplex poly-foam basin and (2) 2" Tri-checks (check valve, ball valve and union all-in-one).

#### CHECK VALVES -

2" Cast Iron and 2" PVC full flow design.

The packages listed above are available in 2" and 3" vertical discharge and vent, 115V or 230V. Consult factory for other combinations and prices. Polyethylene basins recommended for indoor installations only.

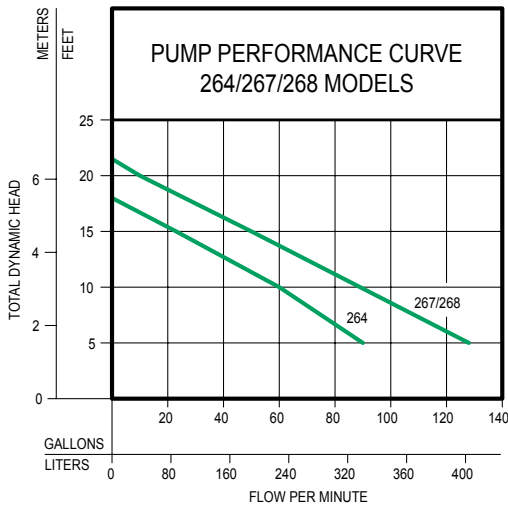


TOTAL DYNAMIC HEAD/FLOW  
PER MINUTE  
SEWAGE AND DEWATERING

MODELS		264		267/268	
Feet	Meters	Gal.	Liters	Gal.	Liters
5	1.5	90	341	128	484
10	3.1	60	227	89	337
15	4.6	23	87	50	189
20	6.1	-	-	10	38
Shut-off Head:		18 ft.(5.5m)		21.5 ft.(6.6m)	

009969B

## Duplex System for Indoor Applications (unassembled)

### (2) 2" Tri-Check® Valves



### 10-0804 Duplex Alternator



### Duplex Basin with (2) Automatic Pumps



Indoor Sewage Applications Only  
910-0030 (M264 - 4/10 HP) or 910-0031 (M267 - 1/2 HP)

**includes:**

- ✓ (2) Automatic Pumps (M264 or M267) model pumps
- ✓ (1) 10-0804 Smart Pak Residential Alternator with Alarm
- ✓ (1) 31-1105 30" X 36" Poly-foam Basin with 2" vent/discharge
- ✓ (2) 30-0101 Tri-Check® Valves