


FLOW RANGE: 30 -220 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

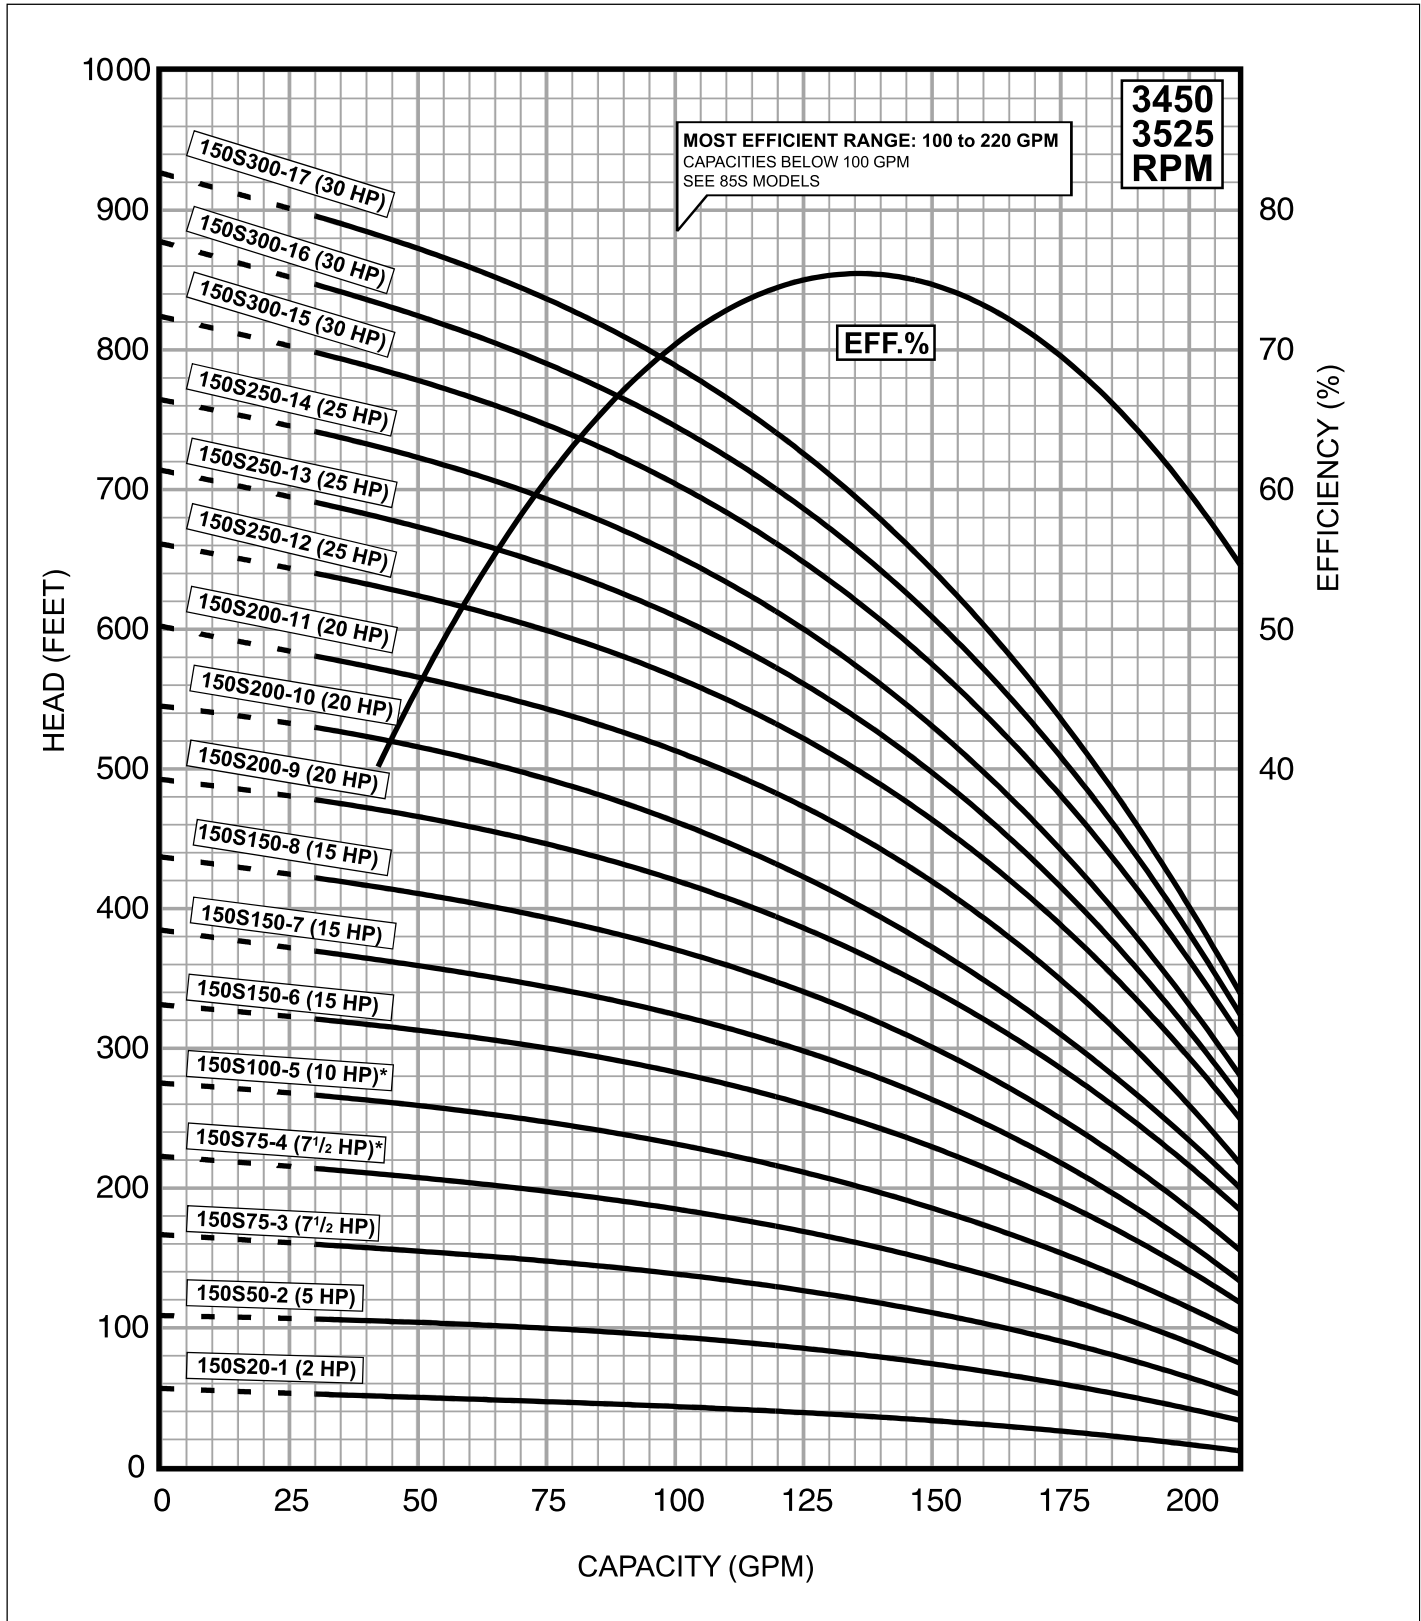


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 4" MOTOR STANDARD, 2-10 HP/3450 RPM
 6" MOTOR STANDARD, 7.5-60 HP/3450 RPM.
 8" MOTOR STANDARD, 75 HP/3525 RPM.
 * Alternate motor sizes available.

Performance conforms to ISO 9906. 1999 (E) Annex A
 Minimum submergence is 5 feet.

FLOW RANGE: 30 -220 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

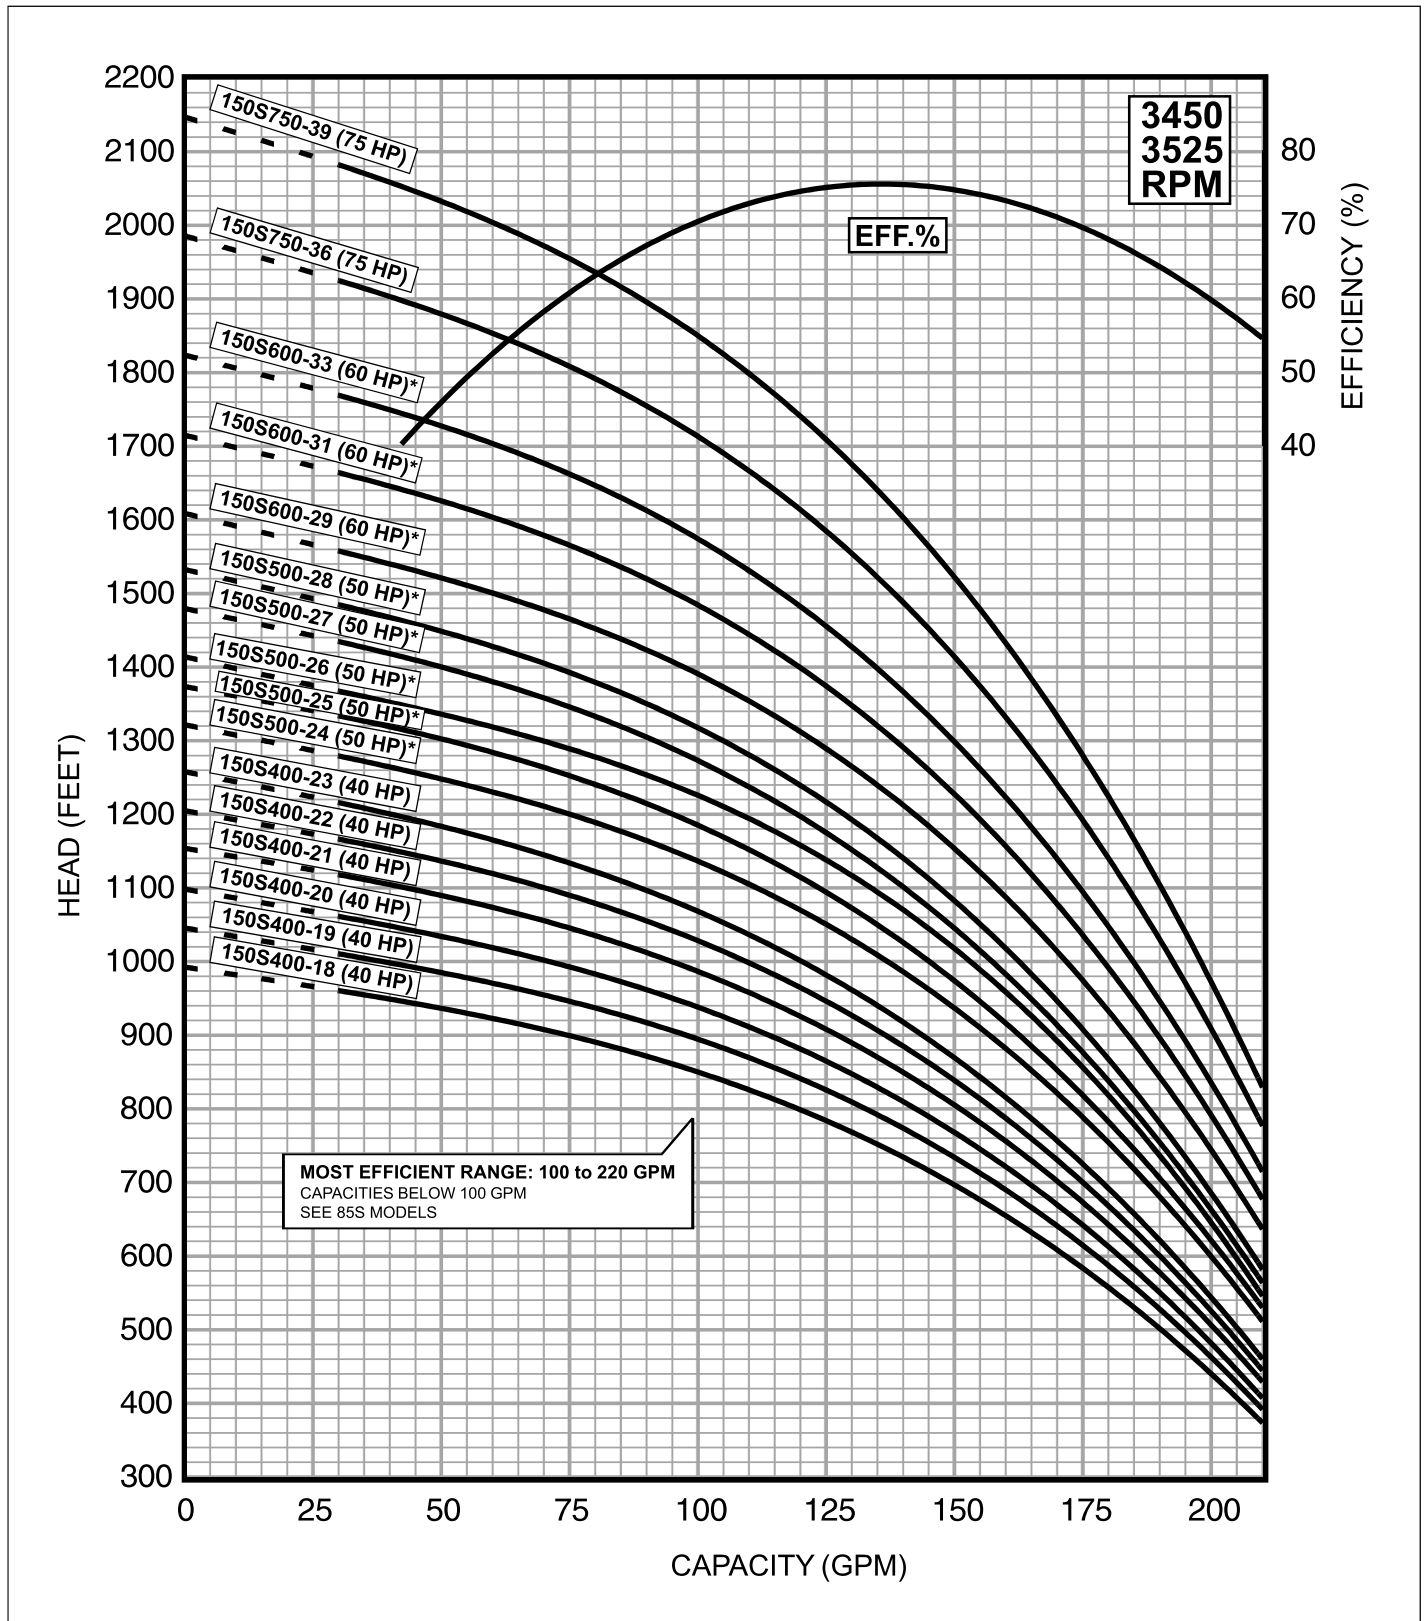

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 6" MOTOR STANDARD, 7.5-60 HP/3450 RPM.
 8" MOTOR STANDARD, 75 HP/3525 RPM.
 * Alternate motor sizes available.

Performance conforms to ISO 9906, 1999 (E) Annex A
 Minimum submergence is 5 feet.