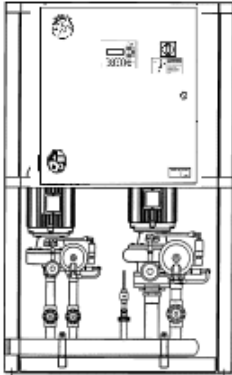


<b>JOB:</b>	<b>REPRESENTATIVE:</b>	
<b>UNIT TAG:</b>	<b>ORDER NO.</b>	<b>DATE:</b>
<b>ENGINEER:</b>	<b>SUBMITTED BY:</b>	<b>DATE:</b>
<b>CONTRACTOR:</b>	<b>APPROVED BY:</b>	<b>DATE:</b>

 SHOWN WITH  
OPTIONAL  
PANEL


# 2 Pump 70M Series Pressure Booster System


## Vertical Configuration

<b>DESIGN DATA:</b>	System Capacity: _____	GPM
	Pressure Required @ Discharge Header: _____	PSIG
	Pressure Drop through Package (include PRV): _____	PSIG
	Minimum Suction Pressure: _____	PSIG

	Pump No. 1	Pump No. 2
<b>PUMP DATA:</b>	Gallons per Minute _____	_____
	Pump TDH (feet) _____	_____
	Header size _____ Inch	_____
	<input type="checkbox"/> PRV <input type="checkbox"/> Check Valve	Size _____
	Series _____	Size _____
	Motor HP _____	_____
	Motor RPM _____ Voltage _____	Hertz _____ Phase _____

**Note:** TDH includes PRV and package losses.

**STANDARD EQUIPMENT:** **Assembled System.** Basic unit fully piped, tested and mounted on steel frame includes: Bronze-fitted B&G pumps; shut-off valves on suction and discharge of each pump; combination pressure reducing-nonslam check valves on discharge side of each pump; thermal protection in discharge header. Headers and interconnecting piping are copper.

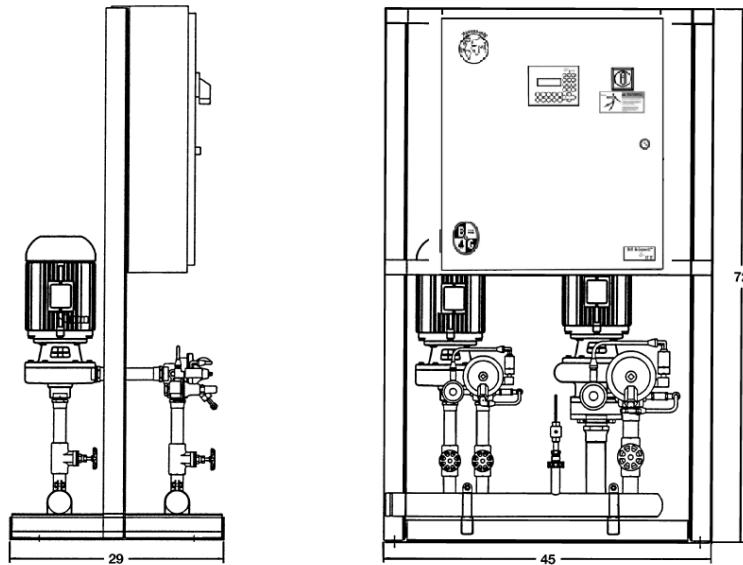

Panel Included

Yes (See Bulletin D-216)

No

**END CAP LOCATION**

(Based on facing front panel)

Both right, as shown

Both left

Suction Left, Discharge right

Suction right, discharge left

Dimensions Valid for 3" and 4" Headers only.

Do not use for construction. Dimensions are approximate and subject to change.

Contact factory for certified dimensions