3/4 HP CAST IRON SUBMERSIBLE SEWAGE PUMP



• 145 GPM @ 5'

- Cast Iron Motor and Pump Housing
- Oil-Filled, Thermally Protected Motor Prevents Overheating
- 2" NPT Discharge Capable of Handling 2" Solids
- Lower Ball Bearing for Quiet Operation and Long Life
- Durable Components
- Designed for Residential and Light Commercial Sewage Applications
- Ideal for Basement or Below Grade Installations

www.blueangelpumps.com

BEF75M Shown

3/4 HP CAST IRON SUBMERSIBLE SEWAGE PUMP




BEF75M

- Manual Operation
- 8', SJTW Power Cord
- 18" or Wider Sewage Basins
- Shipping Weight, 54 lbs
- 3 Year Warranty

NOTE: Use With Single or Double Piggy-Back Float Switch or Control Panel

BEF75T, BEF75T-2

- Piggyback Tether Float Switch
- 8', SJTW Power Cord (BEF75T)
- 20', SJTW Power Cord (BEF75T-2)
- 18" or Wider Sewage Basins
- ON level at 16" / Off level at 7.5"
- Shipping Weight, 54 lbs
- 3 Year Warranty

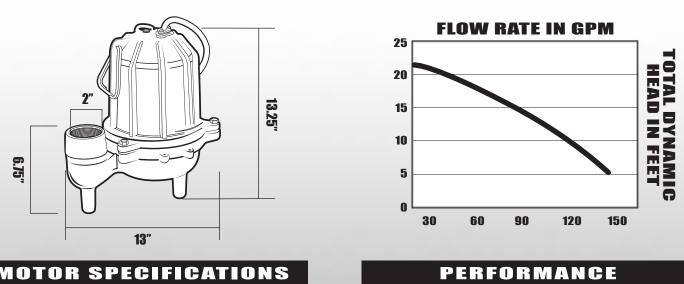

MUTUR SPECIFICATIONS					PERFURMANCE				
MOTOR	RPM	VOLTS	AMPS	Hz	DISCHARGE HEAD	5′	10'	15'	20'
Split Phase	1725	120	11.8	60	Gallons/Minute	145	127	88	45

Preassembled Packages with Basin and Pump Available. See PACKAGED SYSTEMS Section. FOR PUMP AND SYSTEM ACCESSORIES SEE ACCESSORIES SECTION BLUE ANGEL[™] PUMPS • 101 Production Drive • Harrison, OH 45030 • 1-888-636-6628

© 2007 Blue Angel Pumps All Rights Reserved

