


Goulds Pumps

1GD Submersible Grinder Pump PERFORMANCE CURVE



= A 1¹/₄" minimum discharge pipe requires a minimum flow of 10 gpm to maintain a 2 ft./sec. scouring velocity. Flows less than 10 gpm will allow solids to settle in the pipe.

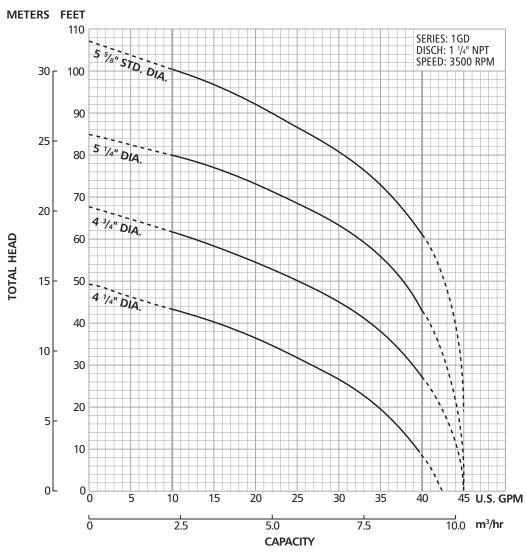

www.goulds.com



Wastewater



Goulds Pumps and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Corporation. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

C1GD August, 2007
© 2007 ITT Corporation

Engineered for life