



ITT

Commercial Water

Goulds Pumps

HSC Multi-Stage
Centrifugal Pump



FEATURES

- **Multi-stage Design:** Provides steady, quiet and vibration-free operation for years of trouble-free service.
- **Impellers:** 20% glass-filled thermoplastic precision molded for high efficiencies.
- **Compact Design:** Close-coupled, space saving design provides easy installation. Flexible coupling and bedplate not required.
- **Mounting:** Can be mounted in vertical or horizontal position.
- **Stainless Steel Pump Shaft:** Hex design provides positive drive for impellers and eliminates clearance adjustments.
- **Corrosion Resistant:** Stainless steel wear rings and coverplates. Electro-coated paint process applied inside and out and then baked on.
- **O-rings:** Throughout for positive sealing.
- **Easy to Service:** Can be taken apart for service by removing four bolts.
- **Motor:** Close coupled design. Ball bearings carry all radial/axial thrust loads. Designed for continuous operation. All ratings are within working limits of the motor.

 **GOULDS PUMPS**

Goulds Pumps is a brand of ITT Corporation.

www.goulds.com

Engineered for life



ITT

GOULDS PUMPS Commercial Water

APPLICATIONS

Specifically designed for the following uses:

- Water circulation
- Booster service
- Liquid transfer
- Spraying systems
- Jockey pump service
- General purpose pumping

SPECIFICATIONS

Pump

- Capacities: to 50 GPM.
- Pressures: to 94 PSI (217 feet).
- Pipe connections: 1¼" suction, 1" discharge.
- Temperatures: to 180°F (82°C) max.
- Maximum working pressure: 125 PSI.
- Rotation: right hand, ie; clockwise when viewed from motor end.

Motor

- NEMA standard
¾ – 1½ HP, 115/230 V;
2 HP, 230 V, 60 Hz.
- Single phase (standard).
- Three phase available –
see price book for order numbers.
- 3500 RPM.
- Built-in overload with automatic reset.
- Capacitor type.
- Stainless steel shaft.


Single Phase Models


HP	Order No.	Stages
¾	HSC07	2
1	HSC10	2
1½	HSC15	2
2	HSC20	3

Goulds Pumps is ISO 9001 Registered.

COMPONENTS

Item No.	Description
1	Mechanical seal
2	Impellers
3	Intermediate stage
4	Casing
5	Stainless steel hex shaft
6	Stainless steel wear rings
7	Stainless steel cover plates
8	O-ring seals
9	Impeller bolt and washer

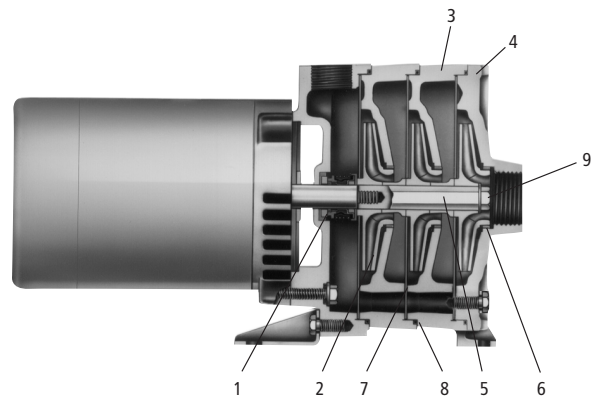



ITT


GOULDS PUMPS
Commercial Water

DIMENSIONS AND WEIGHTS

Model	HP	Length	Width	Height	Wt. (lbs.)
HSC07	¾	15	8	9	53
HSC10	1	16	8	9	58
HSC15	1½	17	8	9	72
HSC20	2	19	8	9	75

(All dimensions are in inches and weight in lbs. Do not use for construction purposes.)

PERFORMANCE CURVE

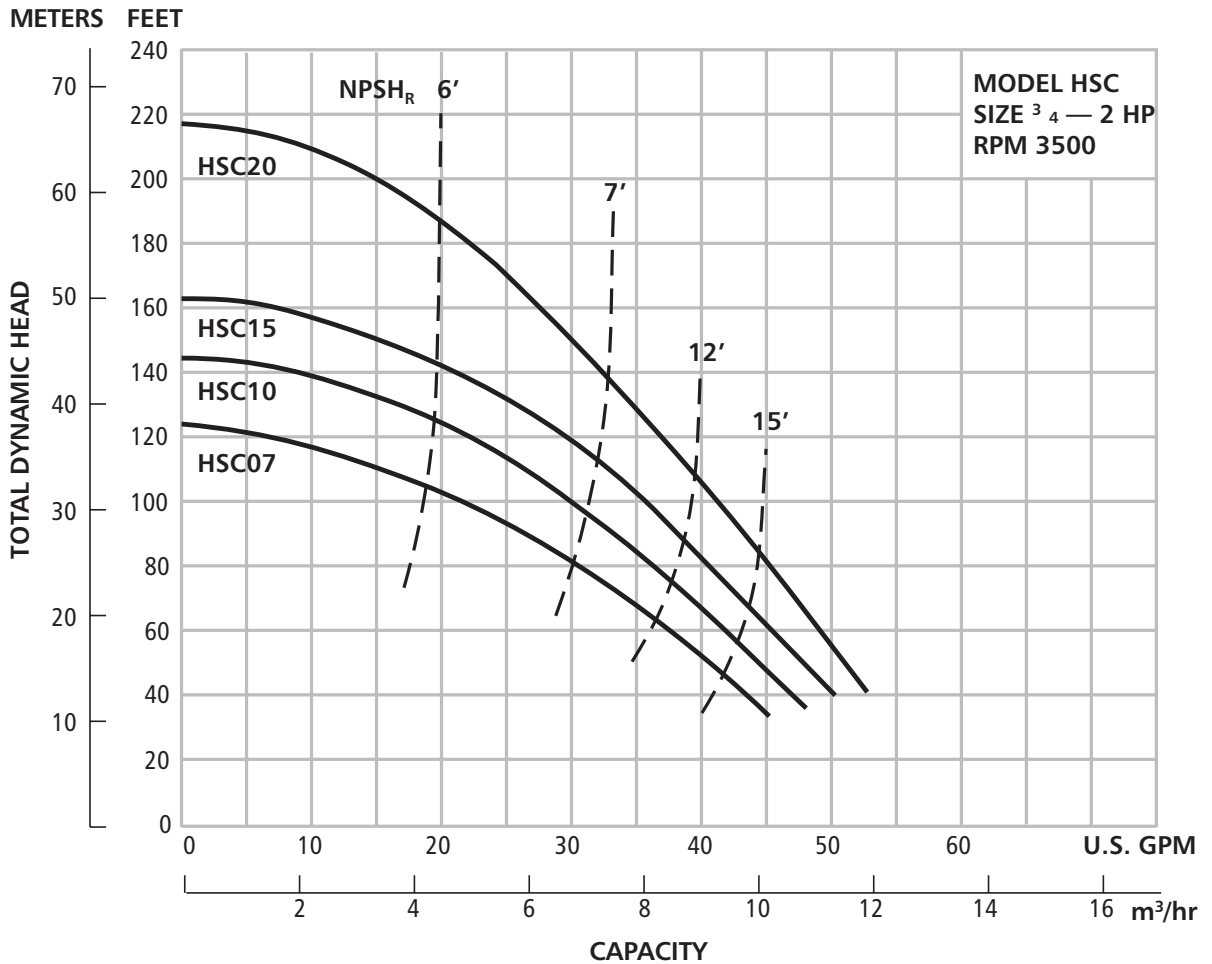

TO CONVERT FEET OF WATER TO PSI – DIVIDE FEET BY 2.31



ITT

Commercial Water



Goulds Pumps and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Corporation.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

BHSC February, 2008
© 2008 ITT Corporation

Engineered for life