

MCU SERIES

The ideal solution for automatically removing liquid condensation from air conditioning and heating systems, refrigeration equipment and much more.

APPLICATIONS

Air conditioners, dehumidifiers, ice makers, high-efficiency furnaces, refrigeration systems, and water coolers

SPECIFICATIONS

- Housing – ABS, high temperature, acid resistant thermoplastic
- Check Valve Included
- Shut Off Head – 20 ft. (MCU20S) and 15 ft. (MCU15/15S)
- Discharge – 3/8" I.D. plastic tubing (not included)
- Tank Capacity – 2 quarts
- Motor/Electrical Data – Bearingless sealed motor, 115V, 1.45A, 1Ø, 60Hz
- Capacity – Up to 200 gallons per hour



FEATURES

High Lift Capacity (MCU20S)

Powerful motor lifts liquid up to 20 feet

Easy Fit

4-3/4" low-profile design fits most applications

Built-in Safety Switch (MCU15S/MCU20S)

Shuts down furnace/air conditioner before tank overflows

Thermal Overload Protection

Durable, Corrosion Resistant

High-impact thermoplastic resists corrosion and 190°F intermittent liquid temperature

Extended Life

Sealed motor provides longer service life than similar condensate units

6 ft. Power Cord

ORDERING INFORMATION


| Catalog Number | Volts | Phase/Cycles | Amps | Cord Length | Approx. Wt. Lbs. |
|----------------|-------|--------------|------|-------------|------------------|
| MCU15 | 115 | 1/60 | 1.45 | 6' | 3.25 |
| MCU15S | 115 | 1/60 | 1.45 | 6' | 3.25 |
| MCU20S | 115 | 1/60 | 1.45 | 6' | 3.25 |

NOTE: For indoor use only.


In order to provide the best products possible, specifications are subject to change.

Myers® is a registered trademark of Pentair Water.

DIMENSIONS

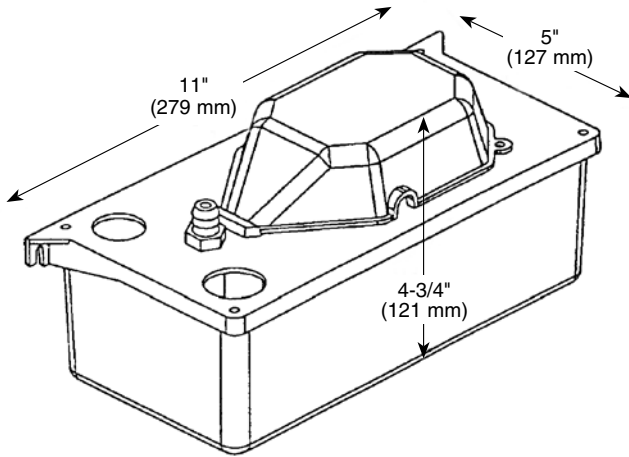

PUMP PERFORMANCE

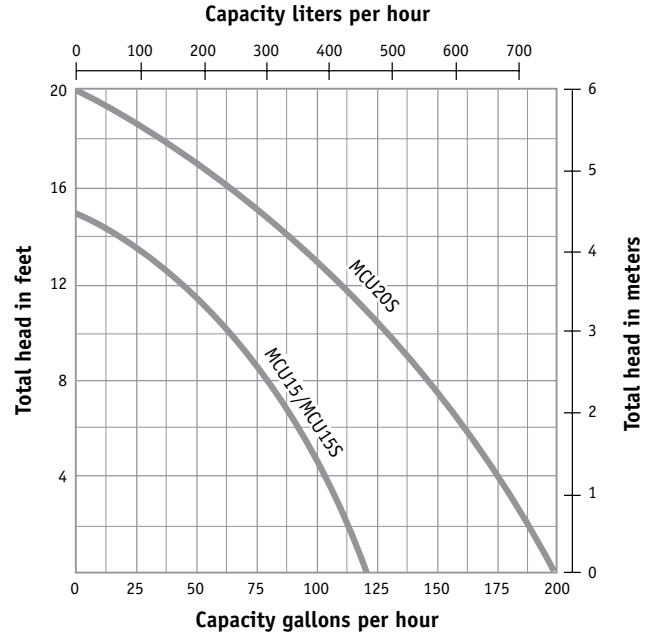

| Catalog Number | Gallons per Hour at Discharge Head in Feet | | | | |
|----------------|--|-----|-----|-----|-----|
| | 0' | 5' | 10' | 15' | 20' |
| MCU15 | 120 | 90 | 65 | 0 | - |
| MCU15S | 120 | 90 | 65 | 0 | - |
| MCU20S | 200 | 170 | 130 | 80 | 0 |