


SP75 SERIES

3/4 HP Composite Submersible Sump Pump

SPECIFICATIONS

Applications	Basement Sumps, Dewatering, Utility	
Capacities	100 GPM	378 LPM
Shut-off Head	25'	7.6 m
Operation: Tethered models or Manual models		
On	12-1/2"	318 mm
Off	3-1/2"	89 mm
Solids Handling	1/8"	3.2 mm
Liquids Handling	drain water	
Continuous Liquid Temp.	77°F	25°C
Motor Electrical Data	3/4 HP (3450 RPM); PSC with thermal overload, 115V, 7.5 FLA, 1Ø, 60Hz	
Acceptable pH Range	6-9	
Shaft Seal	double lip	
Housing	resin and stainless steel	
Power Cord	10' (3 m) or 20' (6 m), 16/3, STJW, STJW-A	
Discharge, NPT	1-1/4" or 1-1/2" with adapter	
Min. Sump Diameter		
Float:	14"	345 mm
Vertical:	10"	254 mm

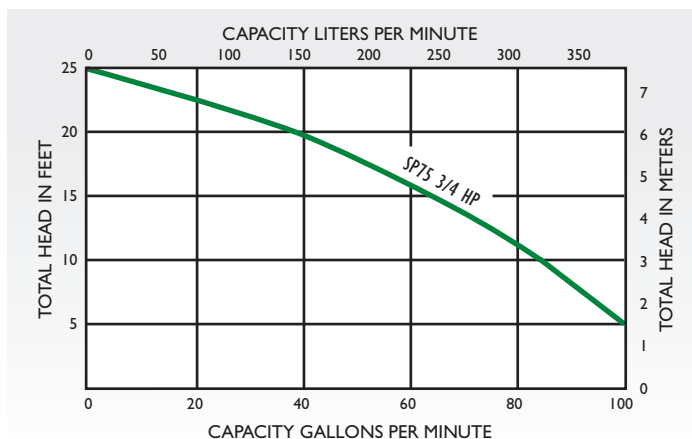

FEATURES

- 3/4 HP
- Energy-efficient PSC motor
- Includes check valve and universal adapter for 1-1/4" (32 mm) or 1-1/2" (38 mm) pipe
- High-impact resin and stainless steel construction
- Piggyback-style float for automatic or manual operation
- Oil-filled motor with automatic reset overload provides safe operation
- Ball-bearing construction for long life
- Easily replaceable power cord with optional lengths available




SUMP PUMPS

SP75 SERIES


3/4 HP Composite Submersible Sump Pump

OUTLINE DIMENSIONS

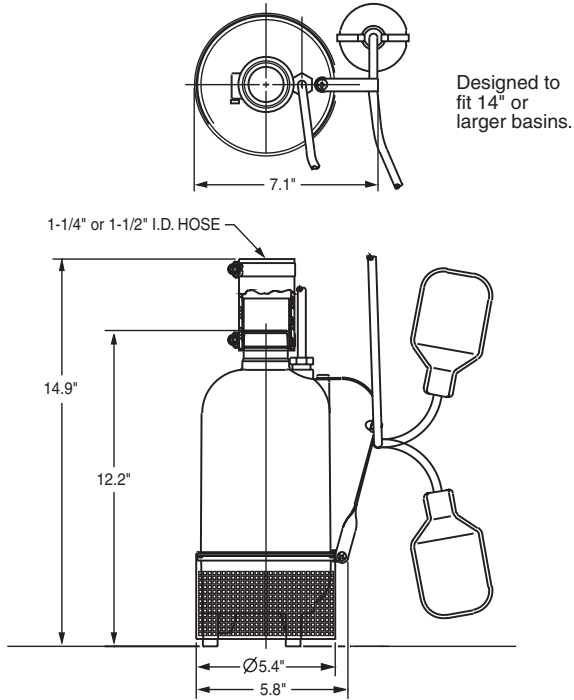

Designed to fit 14" or larger basins.

SECTIONAL VIEW

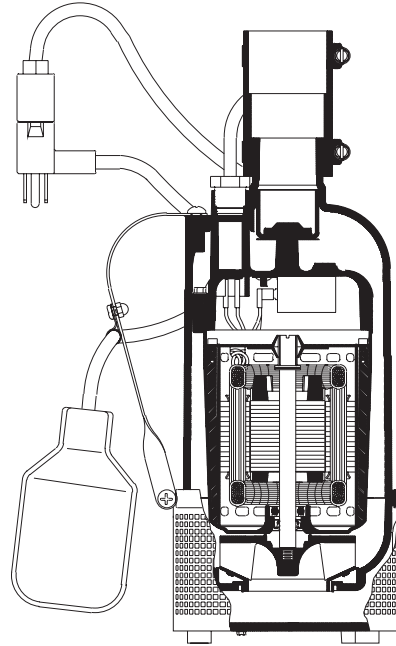

Dimensions (in inches) are for estimating purposes only.

PUMP PERFORMANCE

Vertical Lift Feet/Meters	5/1.5	10/3	15/4.6	20/6.1	Shut-off
					25/7.6
Gallons/Liters Per Minute	100/379	84/318	64/242	39/148	No Flow