

Liberty Pumps®

250-Series



MODEL 257



Available with
Wide-Angle Switch



Cast Iron Submersible Sump/Effluent Pumps

1/3 hp
1-1/2" Discharge
1/2" Solids Handling

Features:

- Unique one-piece cast body eliminates motor housing seal ring
- Durable epoxy powder coat finish
 - Vortex style impeller
 - Permanently sealed and lubricated bearings
- Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional)
- Heavy duty VMF switch on vertical float models

Models:

250 Manual
251 Wide-Angle Float
253 Wide-Angle Float, Series Plug
257 VMF, Vertical Magnetic Float

Wide-Angle Floats are mercury-free,
mechanically activated.

innovate. evolve.

250-SERIES

1/3 hp Sump/Effluent Pumps for Professionals!

ALL MODELS FEATURE:

- Rugged 1/3 hp motor, oil filled with thermal overload protection.
- 1/2" solids handling.
- 1-1/2" discharge.
- Hermetically sealed motor and switch cavities, and permanently lubricated bearings.
- Liberty's UNI-BODY casting – a solid, one-piece housing that eliminates the lower motor seal ring found on other pumps.
- Epoxy powder coat finish
- Vortex style impeller for superior solids-handling. Made of high temperature engineering polymer.
- Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional) For 25' cord option, add a "-2" suffix to model number. Example: 257-2 for Model 257 with 25' cord.
- Fasteners – all non-corrosive stainless steel.
- 416 stainless steel rotor shaft.
- **2 YEAR LIMITED WARRANTY**

MOTOR SPECIFICATIONS:

1/3 hp 115V 5.2 amps 60Hz
Thermally Protected & Permanently Lubricated
Maximum Fluid Temperature: 140°F


DIMENSIONAL DATA:

Weight: Model 257: 20 lbs.

Height: 10.5"


Major Width: 9.6" (manual model 250)

PERFORMANCE CURVE

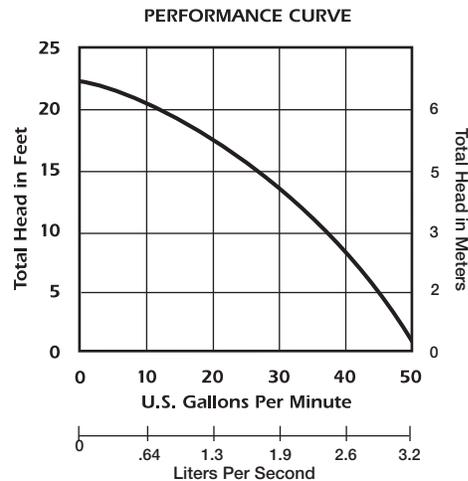


EFFLUENT MODELS


SUMP




Model 250
Manual, no switch.



Model 251
Quick-disconnect wide-angle float, mercury-free.



Model 253
Wide-angle float with series (piggy-back) plug, allows manual operation of pump.



Model 257 VMF
VMF switch, magnetically operated vertical float – operates in a 10" diameter sump.



Dual safety certification for the United States and Canada.

Specifications are subject to change without notice.

Liberty Pumps • 7000 Apple Tree Avenue • Bergen, New York 14416 • Phone 800-543-2550 Fax (585) 494-1839
www.libertypumps.com

Copyright © Liberty Pumps, Inc. 2010
All rights reserved. LLIT4800-R7/10