## "Quality Pumps Since 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.





SECTION: Z4.30.110 ZM2194 0610 Supersedes

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624 visit our web site: www.zoeller.com




## X71 HAZARDOUS ENVIRONMENT SERIES PERFORMANCE DATA

CLASS 1, DIVISION 1, GROUPS C & D 3, 5 & 7½ BHP GRINDER PUMPS Flanged Discharge





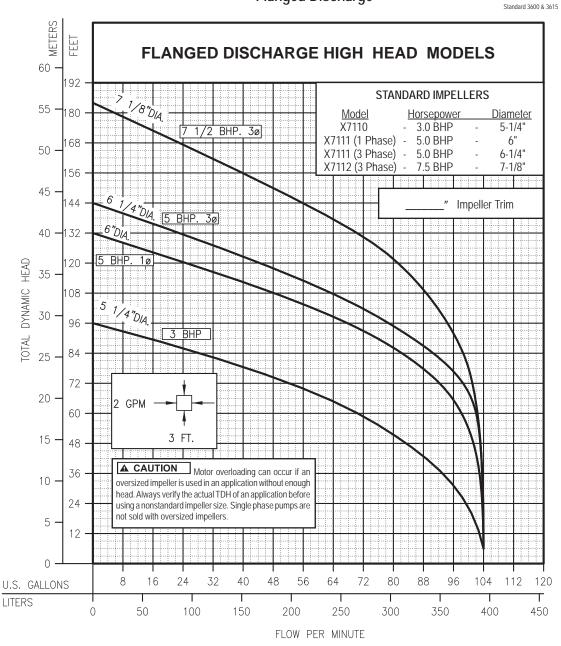

A00523X

Zoeller Engineered Products • 3649 Cane Run Road • Louisville, Kentucky 40211-1961 • (502) 778-2731

SWPA Data Categories Presented -- Data on this sheet supply design information as the minimum recommended by the Submersible Wastewater Pump Association and is defined in accordance with SWPA's Standardized Definitions for Pump and Motor Characteristics. The accuracy of the data is the responsibility of Zoeller Engineered Products.



## X71 HAZARDOUS ENVIRONMENT SERIES PERFORMANCE DATA

CLASS 1, DIVISION 1, GROUPS C & D 3, 5 & 7½ BHP GRINDER PUMPS Flanged Discharge








STANDARD	INDEL	LEDC

<u>Model</u>		Horsepower		Diameter
X7110	-	3.0 BHP	-	4-1/4"
X7111	-	5.0 BHP	-	5-1/4"
X7112	-	7.5 BHP	-	6"

**A CAUTION** Motor overloading can occur if an oversized impeller is used in an application without enough head. Always verify the actual TDH of an application before using a nonstandard impeller size. Single phase pumps are not sold with oversized impellers.

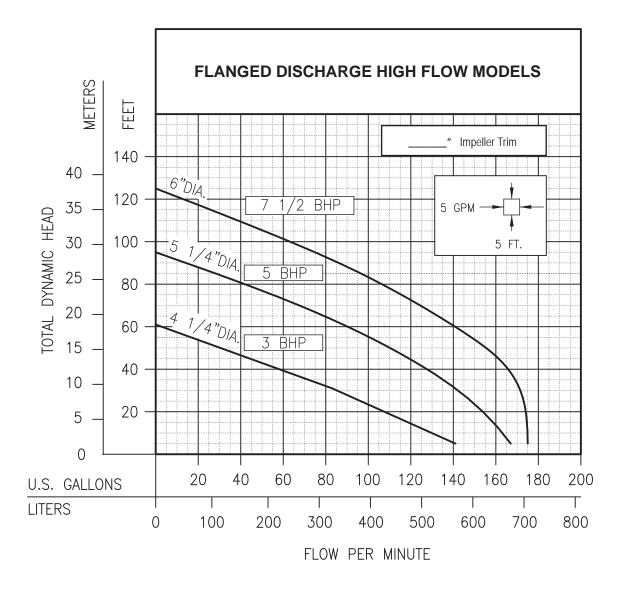

A00550X