



# self-priming cast iron convertible jet pumps



**FL Series Pumps feature a proven self-priming “convertible” design. The same convertible jet can be attached to pump for use on shallow well installation, or be utilized in 4" or larger wells for use as a double pipe deep well jet.**

**FL Series Pumps provide high capacities up to 11 GPM... depths to 90 feet. They are rated for 30-50 PSI operation.**

### APPLICATIONS

- **Water systems and sprinkling...** for homes, farms and cottages.

### SPECIFICATIONS

- Body and Base** – Close grained cast iron
- Impeller** – Lexan®
- Diffuser** – Reinforced polypropylene
- Shaft** – One piece threaded 416 stainless steel
- Pressure Switch Pre-Set** – 30 50 PSI
- Suction Ports** – Drive over Suction

## FL/FLJ\* SERIES

### FEATURES

- Quality Construction** – Close grained cast iron pump body and base are rugged one piece unit, specially treated to resist corrosion. Drain port provided for easy winterizing.
- Pressure Regulator** – Simple, built in regulator is performance proven. Adjustable for best performance on all deep well installations.
- Lexan® Impeller** – Precision molded for perfect balance... ultra smooth for highest performance and efficiency.
- Precision Molded Diffuser** – Pump primes faster; handles more air, with multi port, precision molded, reinforced polypropylene diffuser.
- Mechanical Shaft Seal** – Precision lapped and highly polished carbon ceramic, stainless steel construction. Internal design guarantees continuous water lubrication for maximum protection.
- Motor Windings** – Superior insulation materials protect against excessive moisture and contaminants... assures prolonged motor life.
- Balanced Rotor** – Die cast under high pressures for uniform performance and greater efficiency... dynamically balanced.
- Heavy-duty Ball Bearings** – Shielded, permanently lubricated bearings, extensively tested to ensure extended life and smooth, quiet operation.
- Pump and Motor Shaft** – Stainless steel for maximum corrosion resistance; one piece threaded shaft for positive impeller drive and alignment.
- Dustproof Cover** – Dustproof canopy protects all electrical components from dirt, dust and insects; ventilating air cannot contaminate vital switching components... eliminates the most common cause of motor failure.

### ORDERING INFORMATION

Catalog Number	HP	Description	Pipe Tapping Sizes			Motor Voltage	Approx. Wt. Lbs.
			Suction	Drive	Disch.		
5FL/5FLJ*	1/2	Base Mounted Pump	1-1/4"	1"	1"	115/230	44
7FL/7FLJ*	3/4	Base Mounted Pump	1-1/4"	1"	1"	115/230	45

\*FLJ Models include ejector package.

A Jet Package should be ordered with every FL Series Pump.


**NOTE:** Pumps installed with a PRO-Source™ tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving flow of pump at relief pressure.

BERKELEY® is a registered trademark of Pentair Water. Lexan® is a registered trademark of General Electric Co. PRO-Source™ is a registered trademark of Pentair Water. In order to provide the best products possible, specifications are subject to change.



# self-priming cast iron convertible jet pumps

## OUTLINE DIMENSIONS

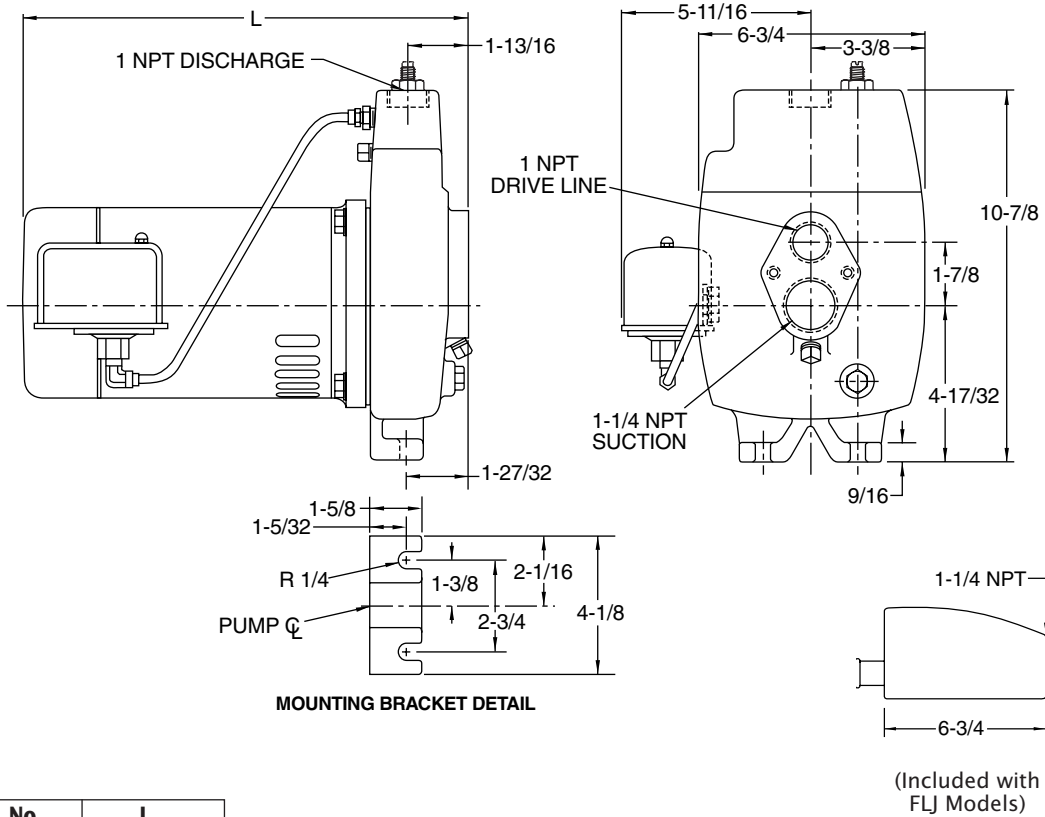

Cat. No.	L
5FL	12 - 13/16
7FL	13 - 9/16

Dimensions (in inches) are for estimating purposes only.

## PUMP PERFORMANCE – FLJ MODELS\*

Catalog Number	Ejector Package (Included)	Shallow Well		Deep Well	
		Nozzle	Venturi	Nozzle	Venturi
5FLJ	J198-26	J34P-41	N32P-66B	J34P-42	J32P-18
7FLJ	J198-27	J34P-41	N32P-66B	J34P-43	J32P-18

\*FLJ Models use venturis and nozzles shown below. Specific performances are shown in the FL Models charts.



# self-priming cast iron convertible jet pumps

<b>PUMP PERFORMANCE (Capacity in Gallons per Minute)</b>																	
<b>SHALLOW WELL, 5' 10' 15' 20' 25' PUMPING DEPTHS</b>																	
HP	Cat. No.	Disch. Press.	Pumping Depth to Water in Feet														
			5 Ft. lift			10 ft. lift			15 ft. lift			20 ft. lift			25 ft. lift		
5FL	1/2	<b>Jet Package</b>	<b>10SD</b>	<b>29SD</b>		<b>10SD</b>	<b>29SD</b>		<b>10SD</b>	<b>29SD</b>		<b>10SD</b>	<b>29SD</b>		<b>10SD</b>	<b>29SD</b>	
		Venturi N32P--	-67B	-66B		-67B	-66B		-67B	-66B		-67B	-66B		-67B	-66B	
		Nozzle J34P--	-44	-41		-44	-41		-44	-41		-44	-41		-44	-41	
		20 PSI	12.0	9.1		9.7	8.4		12.0	7.3		9.7	6.2		6.7	4.7	
		30 PSI	10.8	9.0		9.5	8.3		10.8	7.2		9.5	6.1		6.7	4.7	
		40 PSI	5.2	7.9		4.2	7.2		5.2	6.3		4.2	5.4		2.5	4.1	
		50 PSI		4.1			3.8			3.3			2.8			2.1	
		60 PSI															
		<b>Shut Off-PSI</b>	<b>53</b>	<b>61</b>		<b>51</b>	<b>58</b>		<b>49</b>	<b>56</b>		<b>47</b>	<b>54</b>		<b>45</b>	<b>52</b>	
7FL	3/4	<b>Jet Package</b>	<b>11SD</b>	<b>10SD</b>	<b>29SD</b>	<b>11SD</b>	<b>10SD</b>	<b>29SD</b>	<b>11SD</b>	<b>10SD</b>	<b>29SD</b>	<b>11SD</b>	<b>10SD</b>	<b>29SD</b>	<b>11SD</b>	<b>10SD</b>	<b>29SD</b>
		Venturi N32P--	-68B	-67B	-66B	-68B	-67B	-66B	-68B	-67B	-66B	-68B	-67B	-66B	-68B	-67B	-66B
		Nozzle J43P--	-44	-44	-41	-44	-44	-41	-44	-44	-41	-44	-44	-41	-44	-44	-41
		20 PSI	20.6	14.4	10.1	19.0	13.2	9.3	16.5	11.5	8.1	13.3	9.5	6.9	9.8	6.9	5.3
		30 PSI	19.6	14.3	9.9	18.1	13.1	9.1	15.7	11.4	7.9	13.3	9.5	6.7	9.8	6.9	5.1
		40 PSI	10.3	12.1	9.8	9.4	11.2	9.0	8.2	9.7	7.8	6.4	8.3	6.6	3.1	6.3	5.1
		50 PSI		4.6	7.3		4.3	6.7		3.7	5.8		2.6	4.9		1.0	3.8
		60 PSI			3.5			3.2			2.8			2.4			
		<b>Shut Off-PSI</b>	<b>55</b>	<b>59</b>	<b>70</b>	<b>53</b>	<b>57</b>	<b>66</b>	<b>50</b>	<b>55</b>	<b>64</b>	<b>48</b>	<b>53</b>	<b>61</b>	<b>46</b>	<b>51</b>	<b>59</b>

**NOTE:** Pumps are supplied with 30 – 50 pressure switch setting. Cut-in pressure settings are adjustable.

<b>PUMP PERFORMANCE (Capacity in Gallons per Minute)</b>																
<b>DEEP WELL (40 PSI) 4" DOUBLE PIPE</b>																
Cat No.	HP	Jet. No.	Uses Venturi	Uses Nozzle	Pumping Depth in Feet									Max. Pump Shut Off Press. PSI		
					20'	30'	40'	50'	60'	70'	80'	90'	Jet at 20 ft. Depth	Jet at Max. Depth		
5FL	1/2	4SD	J32P-24	J34P-41	5.9	4.5	3.4	2.3							68	54
		15SD	J32P-18	J34P-42	4.6	3.9	3.3	2.8	2.3	1.7					84	59
7FL	3/4	54SD	J32P-22	J34P-44	8.0	6.9	5.7	4.8	3.8	3.2					94	70
		55SD	J32P-18	J34P-43	5.0	4.3	3.7	3.2	2.6	2.2	1.8	1.5			96	63
<b>DEEP WELL (40 PSI) 2" SINGLE PIPE</b>																
5FL	1/2	8AP	J32P-18	J34P-42	4.7	4.1	3.4	2.5	1.9	1.5					84	58
7FL	3/4	54AP	J32P-22	J34P-44	7.4	6.3	5.2	3.9	2.5	2.0					82	54
<b>DEEP WELL (40 PSI) 3" SINGLE PIPE</b>																
5FL	1/2	19CP	J32P-24	J34P-41	5.9	4.5	3.4	2.3							68	54
		16CP	J32P-18	J34P-42	4.6	3.9	3.3	2.8	2.3	1.7					84	59
7FL	3/4	9CP	J32P-26	J34P-41	9.4	8.0	6.6								77	68
		54CP	J32P-22	J34P-44	8.0	6.9	5.7	4.8	3.8	3.2					94	70

Tested and rated in accordance with Water Systems Council Standards.

**NOTE:** Pumps installed with a PRO-Source™ tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.

