

# composite engine-driven self-priming pump



*Lightweight, corrosion resistant, engineered composite pump construction make this engine-driven pump extremely versatile for applications where electrical power is not available.*

*Powered by a powerful 5-1/2 HP, PowerPro 4-cycle gasoline engine, rated for continuous-duty, equipped with professional-grade features like an automatic low-oil safety cut, manual throttle, choke and shut-off controls.*

*Securely mounted within a rugged steel framed rollcage, reinforced with steel cross-members, coated for corrosion resistance, equipped with noise dampening, non-slip rubber feet. Suction lift capability of 25 feet.*

## APPLICATIONS

- Water Transfer and Supply
- Sprinkler Turf Irrigation
- Dewatering
- Fire Protection
- Agriculture, Light Commercial and Marine

## ORDERING INFORMATION

Catalog Number	HP	Description	Pipe Tapping Sizes		Approx. Wt. Lbs./Kg.
			Suction	Discharge	
EDP55RV	5-1/2	Engine-driven pump w/roll cage	2" NPT	2" NPT	46/20.9

## ACCESSORIES

Catalog Number	Description	Approx. Wt. Lbs./Kg.
FP2735	2" x 15' Suction Hose Kit	15/6.8
FP2731	2" x 25' Discharge Hose Kit	6/2.7



**FP2735**  
Suction  
Hose Kit



**FP2731**  
Discharge  
Hose Kit

**PRO-SOURCE™**  
**PUMPER**

## SPECIFICATIONS

**Body** – Reinforced corrosion resistant Thermoplastic

**Impeller** – Polymer

**Diffuser** – Reinforced corrosion resistant Thermoplastic

**Seals** – Viton mechanical

**O-rings** – Viton

**Check Valve** – Viton

**Roll Cage** – Coated steel frame with cross member and stay-in-place (no-slip) rubber feet

**Engine** – 5-1/2 HP PowerPro

**Dimensions** – 21"H x 17"D x 21"L

**Fasteners** – 300 Grade stainless steel

## FEATURES

**Rugged Light-Weight Design**

**Corrosion Resistant Composite Pump Construction**

**Chemical Resistant Viton Seals, O-rings with Stainless Steel Fasteners**

**Built-in Check Valve**

## ACCESSORIES

**Suction Hose Kit** – Built-in 2" NPTF swivel fitting and 2" NPTM fitting for easy hookup; coil-reinforced wall prevents collapse; includes aluminum suction screen to prevent debris from reaching pump


**Discharge Hose Kit** – Built-in 2" NPTF swivel fitting and 2" NPTM fitting for easy hookup; collapsible for easy roll-up and storage; reinforced wall adds durability

PRO-Source™ is a trademark of Pentair Water.


In order to provide the best products possible, specifications are subject to change.

# composite engine-driven self-priming pump

## PUMP PERFORMANCE

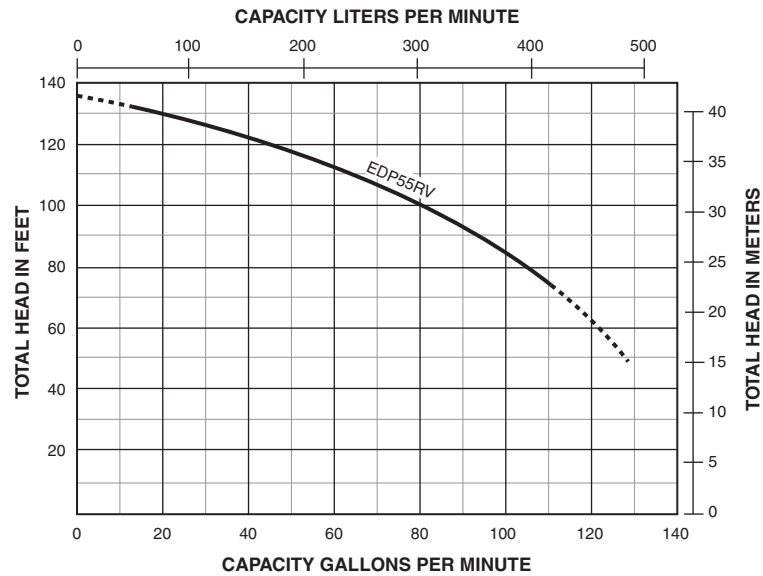

## OUTLINE DIMENSIONS

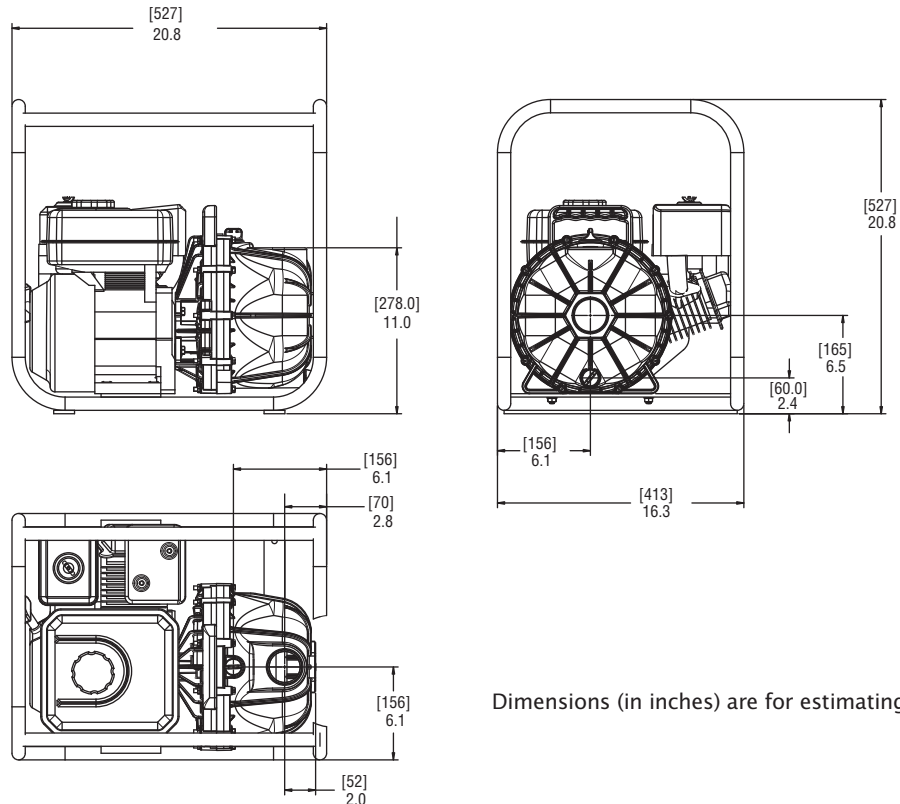

Dimensions (in inches) are for estimating purposes only.