

HYDROMATIC®

BV-40

Submersible Sewage Ejector Pump

- Manual or automatic operation
- Two inch solid handling capability
- Residential wastewater and sewage applications



Piggyback Switch Plug



Wide angle float operation available



Improved Diaphragm Switch



HYDROMATIC®
Pentair Pump Group


BV-40 - Submersible Sewage Ejector Pump

Details


Pump Characteristics

Pump/Motor Unit	Submersible
Automatic Models	BV-40AW1 or BV-40AD1
Horsepower	4/10
Full Load Amps	12.6
Motor Type	Shaded Pole (4 Pole)
R.P.M.	1550
Phase Ø	1
Voltage	115
Hertz	60
Operation	Intermittent
Temperature	120°F Ambient
NEMA Design	A
Insulation	Class A
Discharge Size	2" NPT std.
Solids Handling	2"
Unit Weight	35 lbs.
Power Cord	18/3, SJTW, 10'/20' std.

Performance Data

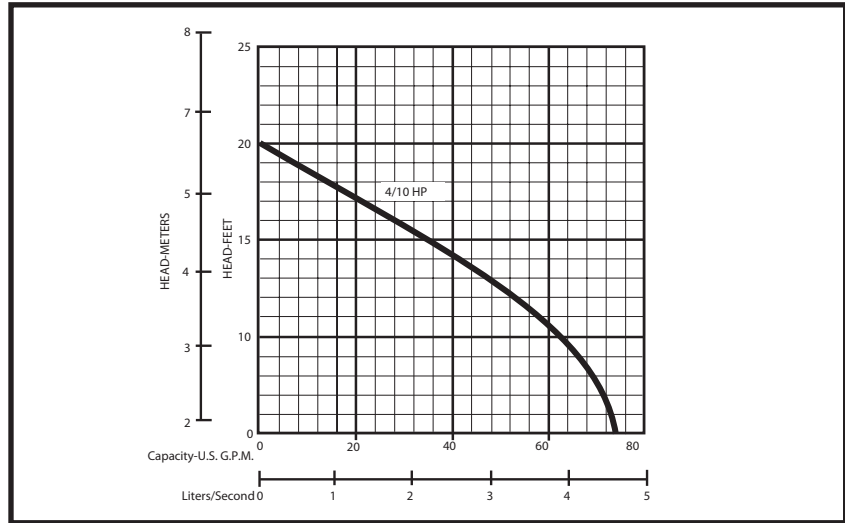

Dimensional Data

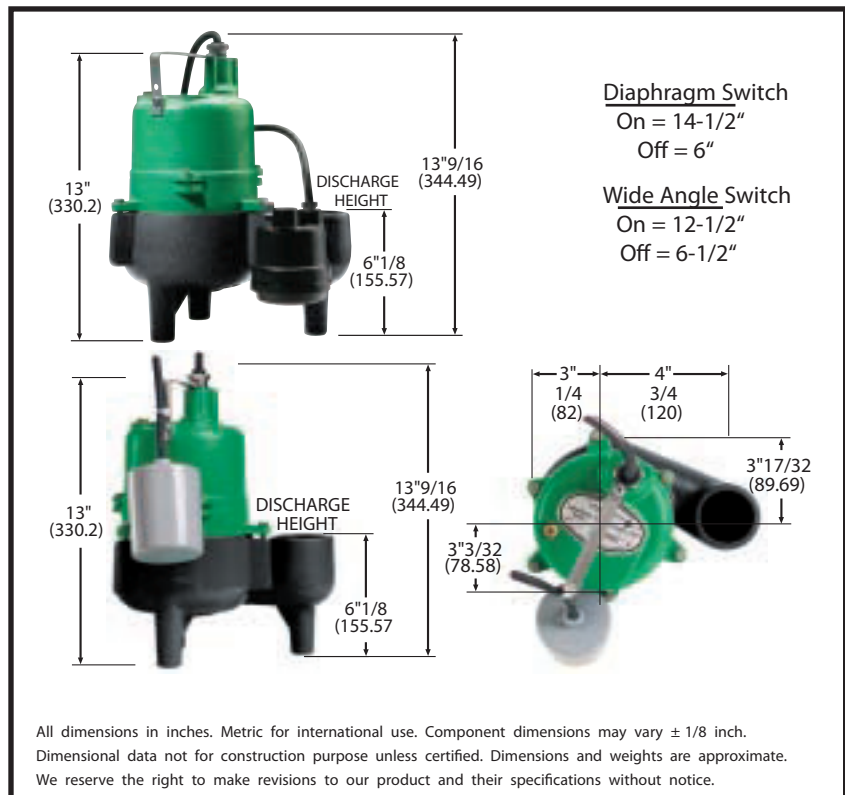

Materials of Construction

Handle	Steel
Lubricating Oil	Dielectric Oil
Motor Housing	Cast Iron
Seal Plate	Cast Iron
Pump Casing	Engineered Thermoplastic
Shaft	Stainless Steel
Mechanical Shaft Seal	Seal Faces: Carbon/Ceramic Seal Body: Anodized Steel Spring: Stainless Steel Bellows: Buna-N
Impeller	Engineered Thermoplastic
Upper Bearing	Brass Sleeve Bearing
Lower Bearing	Single Row Ball Bearing
Fasteners	Stainless Steel



USA

1840 Boney Road Ashland, Ohio 44805
Tel: 419-289-3042 Fax: 419-281-4087



www.hydromatic.com

- Your Authorized Local Distributor -

CANADA

269 Trillium Drive Kitchener, Ontario, Canada N2G 4W5
Tel: 519-896-2163 Fax: 519-896-6337