HYDROMATIC®

HPUSP125

Utility Sink Pump

Perfect for basement wet bars, laundry and utility sinks.

- Fully Automatic Operation
- Complete Compact System
- Designed To Be Used with a Sink Where Gravity Drain Line Is Not Available
- Up to 40 GPM with 14' Head
- Easy to Install
  Eliminates the Need for Traps, Vents and Costly Labor
- Quiet, Trouble-Free Operation
  Easily Mounts Beneath Your Sink

Pentair Water™

HPUSP125 – Utility Sink Pump

Details

Specifications

- Housing – thermoplastic
- Power Cord – 8' grounded three-prong, type SJTW
- Liquid Temperature – 32–120ºF (0–50ºC)
- Motor – 1/8 HP
- Electrical – 115V, 4.0 amps, 1-phase, 60 Hz

Parts Included

- Pump Assembly
- Strainer Cup
- 1-1/4" Shut-off (flow balancing valve)
- 1-1/4" Check Valve

Ordering Information

Catalog Number	HP	Voltage	Amps	Phase	Hz	Cord Length	Approx. Wt. Lbs.
HPUSP125	1/8	115	4.0	1	60	8'	15

Pump Performance

Catalog Number	Gallons Per Minute at Discharge Head in Feet			
	0'	4'	8'	12'
HPUSP125	40	34	22	4

In order to prov de the best products poss b e, spec f cat ons are subject to change.

Pump Installation

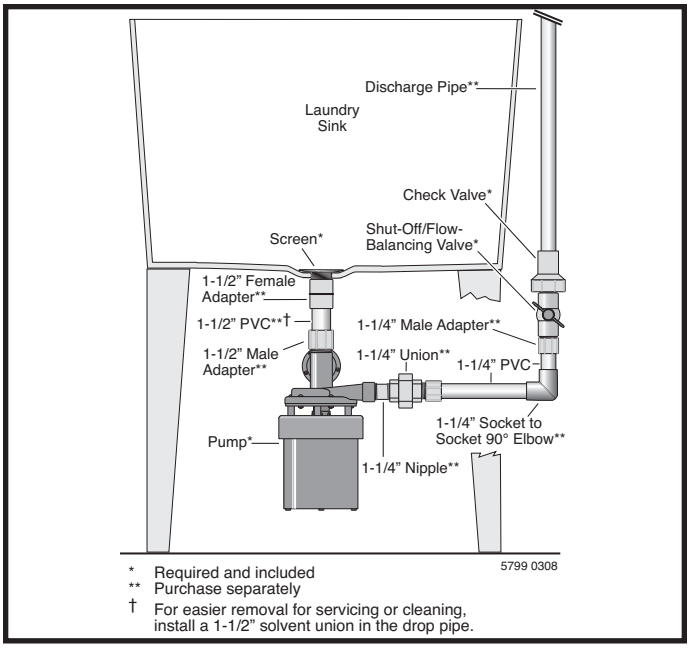

HYDROMATIC®
Pentair Water

– Your Authorized Local Distributor –

USA
740 East 9th Street, Ashland, Ohio 44805
Tel: 419-289-3042 Fax: 419-281-4087

www.hydromatic.com

CANADA
269 Trillium Drive, Kitchener, Ontario, Canada N2G 4W5
Tel: 519-896-2163 Fax: 519-896-6337

© 2009 Hydromatic® Ashland, Ohio. All Rights Reserved.