



# HYDROMATIC®

## HPGR200

60Hz/50Hz  
Submersible Sewage  
Grinder Pump

- Residential Wastewater and Sewage
- No Panel Required
- Durable 2HP grinder pump in either
  - 3450 RPM at 60Hz
  - 2900 RPM at 50Hz



(60 Hz only)



**Pentair**  
**Water™**

# HPGR200 - Submersible Sewage Grinder Pump

## Features

The Hydromatic HPGR200 submersible sewage grinder pump is specifically designed to meet the demands of residential wastewater, sewage applications, and the quality standard of the professional plumbing contractor.

The HPGR200 is ideal for “high head” applications involving single-family residences and cottages. The 1-1/4 inch NPT discharge pump is available with a vertical discharge and can handle capacities up to 58 gallons per minute and heads up to 105 feet in 60 Hz model, up to 53 gallons per minute and heads up to 81 feet in 50 Hz models.

The HPGR200 has a powerful 2 HP oil-filled motor, available in single phase, to provide superior cooling and lubrication, allowing the motor to provide years of trouble-free service. The heavy duty ball bearings upper (radial) and lower (thrust) are continuously lubricated by oil to ensure a long service life.

Hydromatic’s HPGR200 does not require any control panels or liquid level controls to operate the HPGR200 grinder pump in manual mode.


Hydromatic’s HPGR200A2 grinder comes complete with 2 HP listed wide angle piggyback float switch for automatic operations.

Complete “packaged systems” featuring the HPGR200 are also available from Hydromatic to make installation quick and simple.

When it comes to submersible sewage grinder pumps, trust the leader....Hydromatic.




**NO PANEL  
REQUIRED**

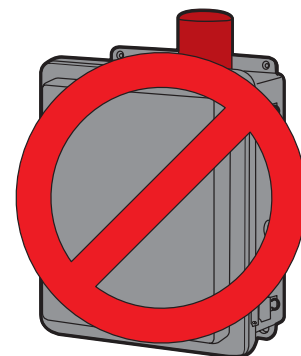

**HYDROMATIC®**  
Pentair Water

**The HPGR200 is a completely submersible sewage grinder pump for residential applications.** Complete *packaged systems* also available.

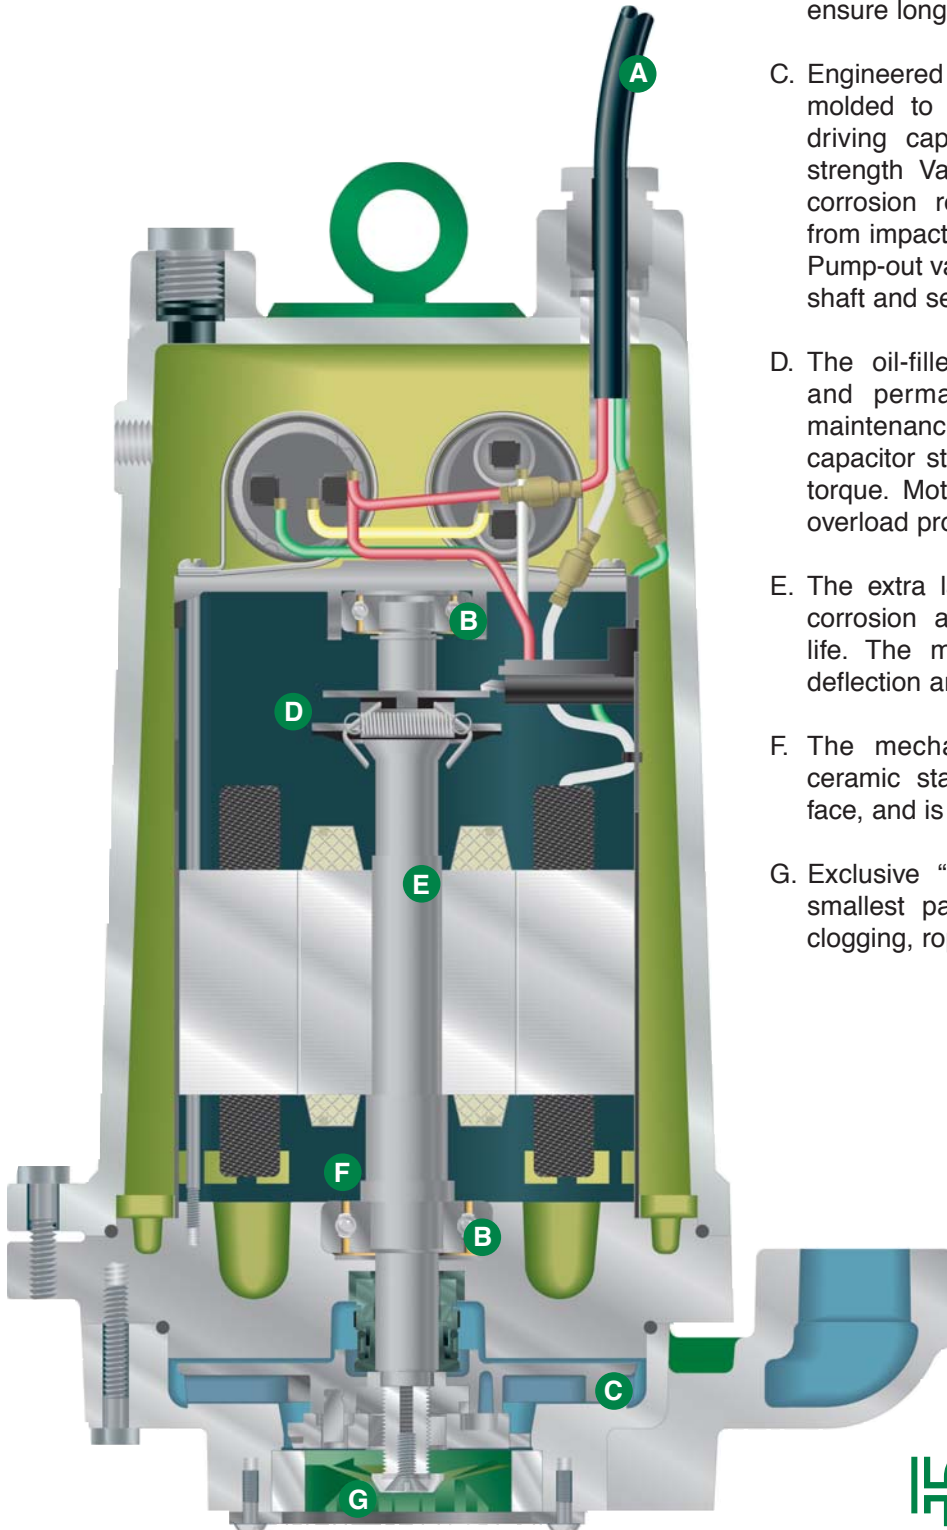

- A. The water resistant power cord with molded plug is available in 20 or 50 foot lengths.
- B. The heavy duty ball bearings, upper (radial) and lower (thrust), are continuously lubricated by oil to ensure long service life.
- C. Engineered non-metallic semi-open impeller is molded to a bronze insert for greatest torque driving capabilities. Impeller is made of high strength Valox which provides highest level of corrosion resistance and maximum toughness from impact for a wide variety of slurry pumpage. Pump-out vanes preclude material buildup around shaft and seal.
- D. The oil-filled motor provides superior cooling and permanent lubrication of bearings, low maintenance and extended service life. 2-HP capacitor start motors provide maximum starting torque. Motor windings contain automatic thermal overload protection.
- E. The extra large stainless steel shaft eliminates corrosion and fatigue to provide longer pump life. The minimum shaft overhang decreases deflection and increases bearing and seal life.
- F. The mechanical seal is constructed with a ceramic stationary face and a carbon rotating face, and is field-proven for long service life.
- G. Exclusive "Dual Cutter" design cuts solids to smallest particle size thereby greatly reducing clogging, roping, or binding.


# HPGR200 - Submersible Sewage Grinder Pump

## Details


### Pump Characteristics

Pump/Motor Unit	Submersible-Grinder
Hertz	60 Hz / 50 Hz
Phase	1 Ø
Voltage	230
Horsepower	2 HP
Full Load Amps	12.5 / 15
Motor Type	Oil Cooled Induction Capacitor Start
R.P.M.	2900 / 3450
Temp.	140° F Ambient
Operation	Intermittent
Thermal Overload	Bi-Metallic
Temperature	Max. Water 140° F
NEMA Design	Type A
Insulation	Class F
Discharge Size	1 1/4" NPT
Unit Weight	95 lbs.
Power Cord	Type SJOW/SJOW-A Water Resistant 600 V, 60° C CSA/UL Approved 20' Ft. Std.

### Performance Data

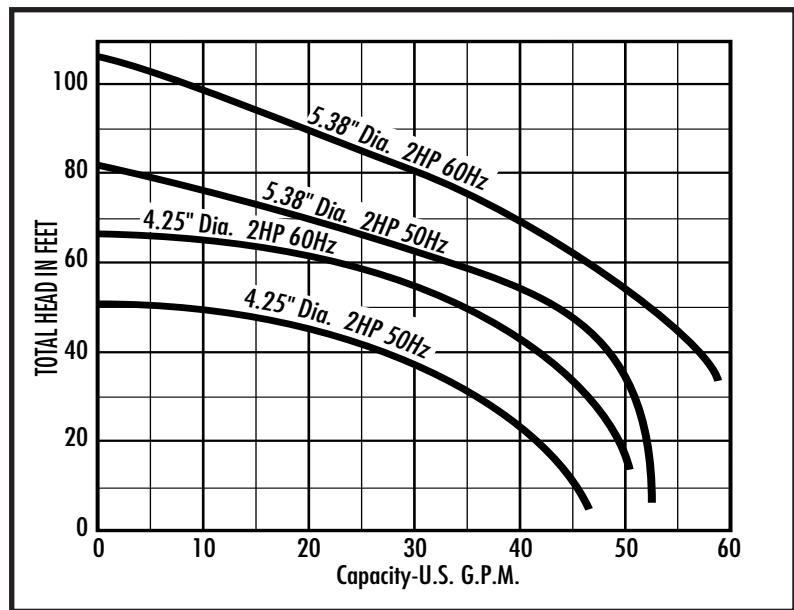

### Dimensional Data

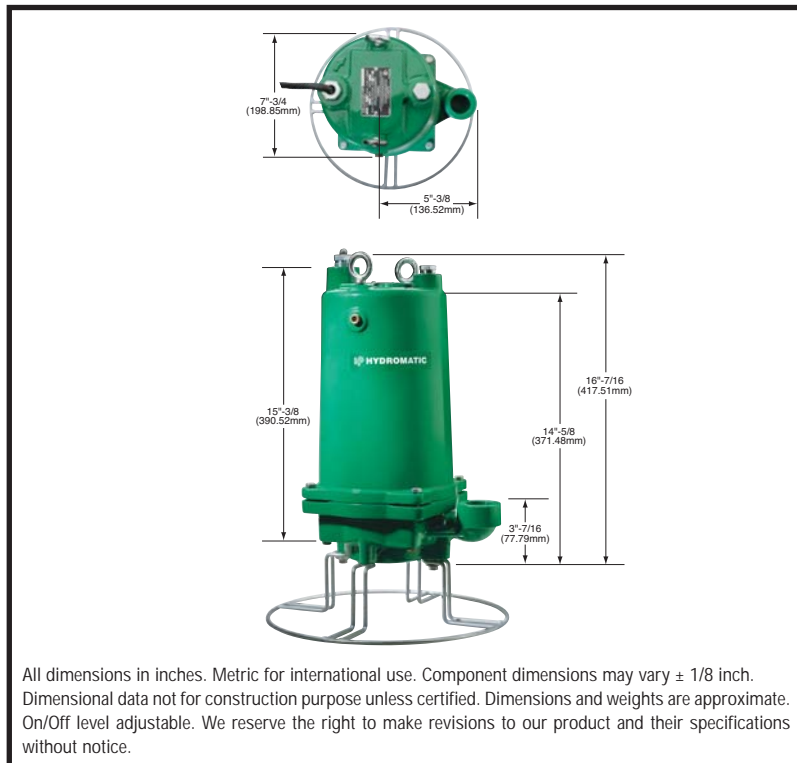

### Materials of Construction

Motor Housing	Cast Iron ASTM-48
Pump Casing	Cast Iron ASTM-48
Coolant/Lubricant	Dielectric Oil
Shaft	Stainless Steel
Mechanical	Seal Faces: Carbon/Ceramic Shaft Seal Seal Body: Stainless Steel Spring: Stainless Steel Bellows: Buna-N
Impeller	High Strength Valox 420SEO with Bronze Insert
Cutters	440C Hardened 55-60 Rockwell C
Upper Bearing	Single Ball Bearing
Lower Bearing	Single Ball Bearing
Fasteners	Stainless Steel



- Your Authorized Local Distributor -

#### USA

740 E. 9th Street Ashland, Ohio 44805  
Tel: 419-289-3042 Fax: 419-281-4087

www.hydromatic.com

#### CANADA

269 Trillium Drive Kitchener, Ontario, Canada N2G 4W5  
Tel: 519-896-2163 Fax: 519-896-6337