
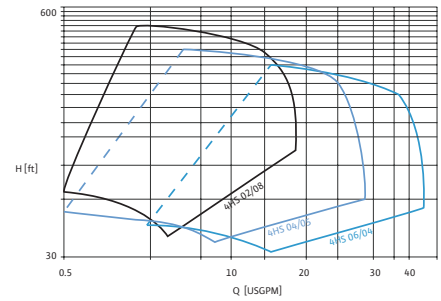


Wilo 4HS

4" Variable Speed Submersible Pumps

Wilo 4HS – 1.5 HP

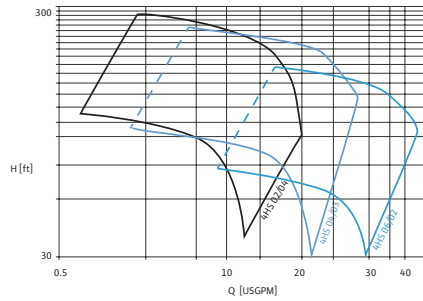

Features and Benefits

- AISI 304 Stainless Steel construction.
- Built-in inverter controlled by CM control module.
- Integrated inverter protects pump and drive from overload.
- Operates according to demand for efficient energy use.

Application

- Potable Water Supply from Water Wells
- Municipal
- Industrial
- Pressure Boosting
- Agriculture / Irrigation

Technical Data

- Max pump diameter is 4 in.
- Max immersion depth 500 ft.
- Max water temperature is 95°F.
- Max sand content 50 ppm
- IP55 (NEMA 12) protection

Wilo 4HS

Model	Includes	Mtr Dia. (in)	HP	PH	Volts (± 15%)	Article Number	Approx. Weight (lbs.)	List Price USD
4HS-02/04	Pump, motor, drive, controller & transducer	4	1½	1	230	2712809	58	2430
4HS-04/03	Pump, motor, drive, controller & transducer	4	1½	1	230	2712810	58	2430
4HS-06/02	Pump, motor, drive, controller & transducer	4	1½	1	230	2712811	58	2430

Model	Includes	Mtr Dia. (in)	HP	PH	Volts (± 15%)	Article Number	Approx. Weight (lbs.)	List Price USD
4HS-02/08	Pump, motor, drive, controller & transducer	4	3	1	230	2712812	83	2890
4HS-04/05	Pump, motor, drive, controller & transducer	4	3	1	230	2712813	83	2890
4HS-06/04	Pump, motor, drive, controller & transducer	4	3	1	230	2712814	83	2890