


# Wilo SP Series

## ECC – Submersible Sump Pump



### Wilo ECC

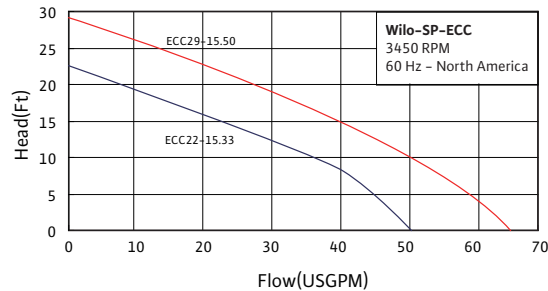

### Accessories

|                    | Page |
|--------------------|------|
| Basins. ....       | 5    |
| Check Valves. .... | 5    |

### Features and Benefits

- Stainless steel bottom-screened inlet
- Replaceable piggyback tether float switch for automatic operation
- Permanent split capacitor motor with automatic thermal overload protection
- 10' power cord included
- CSA certified

### Application

- Sump & Effluent
- De-watering
- Drainage

### Technical Data

- Max fluid temperature 77°F (25°C)
- Single phase, 115v motor
- 1½" NPT Discharge (1¼" with adaptor)
- Cast iron motor housing
- Cast iron pump volute
- Thermoplastic vortex impeller


### Wilo ECC – Submersible Sump Pump

| Model       | Connection    | HP (max) | Phase | Voltage | Approx Weight (lbs) | Skid Qty | Article Number | List Price USD |
|-------------|---------------|----------|-------|---------|---------------------|----------|----------------|----------------|
| ECC22-15.33 | 1½" & 1¼" NPT | 1/3      | 1     | 115     | 20.7                | 90       | 2708303        | 160            |
| ECC29-15.50 | 1½" & 1¼" NPT | 1/2      | 1     | 115     | 22.0                | 90       | 2708304        | 170            |

# Wilo SP

## ETT – Submersible Utility Pumps

Wilo ETT

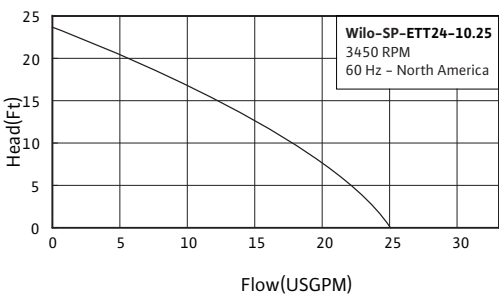

| Accessories        | Page |
|--------------------|------|
| Basins. ....       | 5    |
| Check Valves. .... | 5    |

### Features and Benefits

- Permanent split-capacitor motor with built-in thermal overload protection
- Internal water sensor for automatic on/off operation
- Bottom suction design can pump water down to ¼" from surface
- 15' electrical cord included
- CSA certified

### Application

- Surface de-watering
- General utility applications


### Technical Data

- Max fluid temperature 77°F (25°C)
- Single phase, 115v motor
- 1" NPT Discharge, multiple adaptors
- Thermoplastic motor housing, pump volute and impeller

Wilo ETT – Utility Sump Pump

| Model       | Connections                                                  | HP (max) | Phase | Voltage | Approx Weight (lbs) | Skid Qty | Article Number | List Price USD |
|-------------|--------------------------------------------------------------|----------|-------|---------|---------------------|----------|----------------|----------------|
| ETT24-10.25 | 1" NPT Discharge, 1" NPT Check Valve, ¾" Garden Hose Adaptor | ¼        | 1     | 115     | 8.4                 | 54       | 2708308        | 135            |

### Wilo WCC

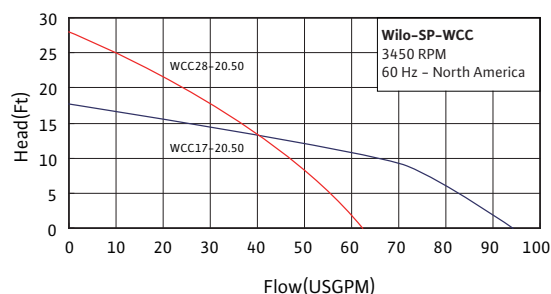

### Accessories

|                    | Page |
|--------------------|------|
| Basins. ....       | 5    |
| Check Valves. .... | 5    |

### Features and Benefits

- Replaceable piggyback tether float switch
- Oil-filled motor for maximum heat dissipation
- Capable of handling 2" solids (WCC17) or ¾" solids (WCC28)
- Built-in thermal overload protection
- 10' power cord included
- CSA certified

### Application

- Residential sewage & effluent
- Drainage

### Technical Data

- Max fluid temperature 130°F (55°C)
- Single phase, 115v motor
- 2" NPT Discharge
- Cast iron motor housing
- Cast iron pump volute
- Thermoplastic impeller


### Wilo WCC – Sewage & Effluent

| Model       | Connection | HP (max) | Phase | Voltage | Approx Weight (lbs) | Skid Qty | Article Number | List Price USD |
|-------------|------------|----------|-------|---------|---------------------|----------|----------------|----------------|
| WCC28-20.50 | 2" NPT     | ½        | 1     | 115     | 22.9                | 125      | 2708301        | 175            |
| WCC17-20.50 | 2" NPT     | ½        | 1     | 115     | 24.9                | 125      | 2708302        | 180            |

# Wilo SP

## ECS – Sump/Effluent Pumps

### Wilo ECS

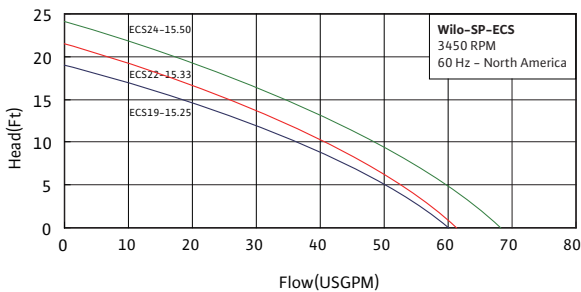

| Accessories        | Page |
|--------------------|------|
| Basins. ....       | 5    |
| Check Valves. .... | 5    |

#### Features and Benefits

- Stainless steel motor housing
- Oil-filled motor for max heat dissipation
- Handles up to ½" solids
- 10' power cord included
- CSA certified
- Ideal for basement installations

#### Application

- Sump & Effluent
- De-watering
- Drainage

#### Technical Data

- Max fluid temperature 77°F (25°C)
- Single phase, 115v motor
- 1½" Discharge (1¼" adaptor included)
- Stainless steel motor housing
- Cast iron volute with stainless steel motor housing
- Thermoplastic impeller

### Wilo ECS – Sump/Effluent Pump

| Model       | Connection      | HP (max) | Phase | Voltage | Approx Weight (lbs) | Skid Qty | Article Number | List Price USD |
|-------------|-----------------|----------|-------|---------|---------------------|----------|----------------|----------------|
| ECS19-15.25 | 1¼" and 1½" NPT | ¼        | 1     | 115     | 20.7                | 80       | 2708305        | 220            |
| ECS22-15.33 | 1¼" and 1½" NPT | ⅓        | 1     | 115     | 21.6                | 80       | 2708306        | 225            |
| ECS24-15.50 | 1¼" and 1½" NPT | ½        | 1     | 115     | 22.7                | 80       | 2708307        | 230            |

### Wilo SP Accessories

#### Sewage Poly Basin – 18" x 30"



| Name              | Description                               | Article Number | List Price (USD) |
|-------------------|-------------------------------------------|----------------|------------------|
| <b>WB-18.30</b>   | 18" x 30" Sewage Poly Basin               | 2708314        | <b>150</b>       |
| <b>WB-18.30-G</b> | Side Gasket for WB-18.30 Basin (required) | 2708317        | <b>27</b>        |
| <b>WB-18.30-L</b> | Lid for WB-18.30 Basin                    | 2708315        | <b>75</b>        |

#### Sump Poly Basin – 18" x 24"



| Name              | Description                          | Article Number | List Price (USD) |
|-------------------|--------------------------------------|----------------|------------------|
| <b>EB-18.24</b>   | 18" x 24" Corrugated Sump Poly Basin | 2708312        | <b>60</b>        |
| <b>EB-18.24-L</b> | Lid for EB-18.24 Basin               | 2708313        | <b>25</b>        |

#### Check Valves



| Name       | Description                             | Article Number | List Price (USD) |
|------------|-----------------------------------------|----------------|------------------|
| <b>ECV</b> | 1½" / 1¼" Inline Rubber-End Check Valve | 2708310        | <b>32</b>        |
| <b>WCV</b> | 2" Inline Rubber-End Check Valve        | 2708311        | <b>35</b>        |



|              |                            |         |           |
|--------------|----------------------------|---------|-----------|
| <b>ECV-C</b> | 2" Compression Check Valve | 2708309 | <b>85</b> |
|--------------|----------------------------|---------|-----------|