


Wilo Stratos D High Efficiency Circulators

Product Brochure



Wilo Stratos D


High Efficiency Circulators

- Applications Include:
- » Heating Systems
 - » Industrial Circulation Systems
 - » Solar Systems
 - » Closed Cooling Circuits
 - » Air Conditioning Systems
 - » Geothermal Systems

Wilo Stratos D




Dual-Volute Design!

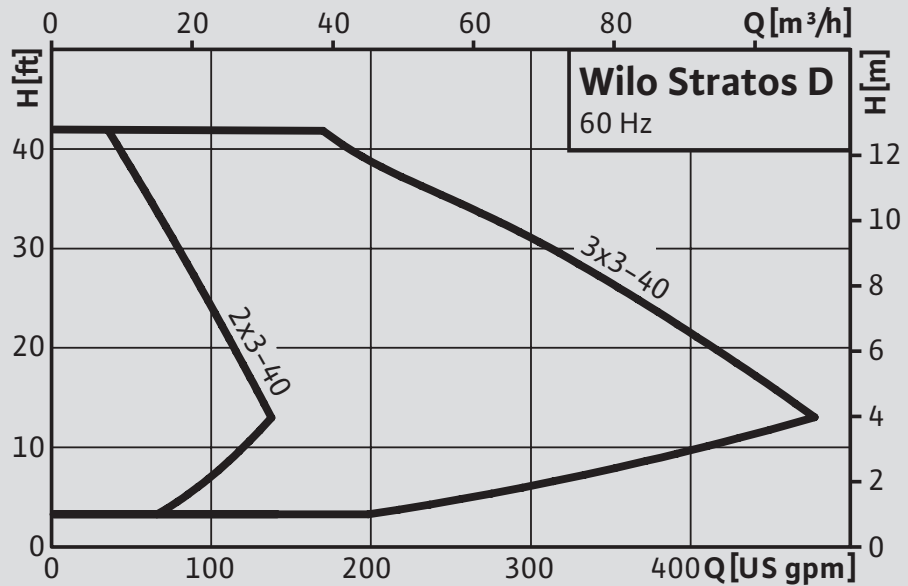

- » Maximum energy savings with ECM technology
- » Dual-volute design cuts installation costs by up to 50%
- » Lead/lag operation with 24 hour automatic alternation
- » Optimised peak load operation
- » Red button technology for quick and easy setup
- » LED display in US units
- » Non-volatile memory
- » Optional infra-red remote control allows access to on-board data logger
- » 6 interface modules available for building automation and external control
- » Integrated overload protection (min/max voltage, max temp, dry run)
- » Cataphoresis coating for corrosion protection
- » Max flow 480 USGPM
- » Max head 43'
- » Fluid temperature range from 14°F to 230°F (-10°C to 110°C)

Up to 80% energy savings!

Compared to a constant speed circulator.

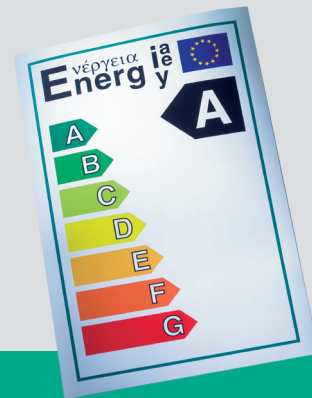

WILO USA LLC

Toll-Free: 866-945-6872
 Web: www.wilo-usa.com
 Email: info@wilo-usa.com

WILO Canada Inc.

Toll-Free: 866-945-6236
 Web: www.wilo-canada.com
 Email: info@wilo-canada.com



Pumpen Intelligenz.