




Pumpen Intelligenz.

Commercial Wet Rotor Circulators

WILO Top S


Product Brochure.



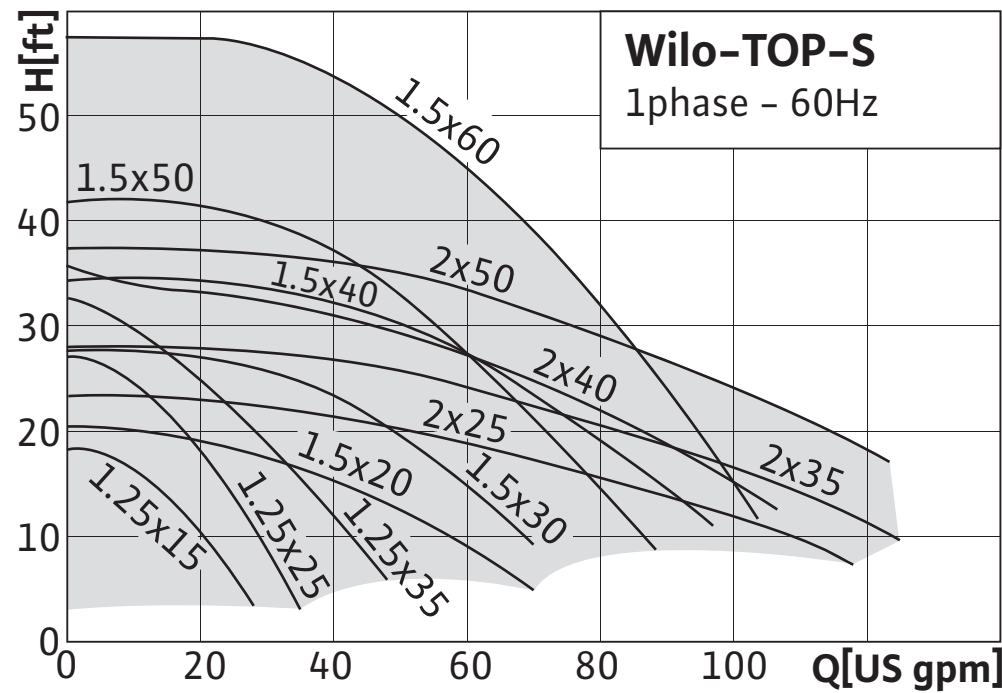


Two Speed
Wet Rotor Circulator


Top S Single Phase Circulator (115v or 230v)

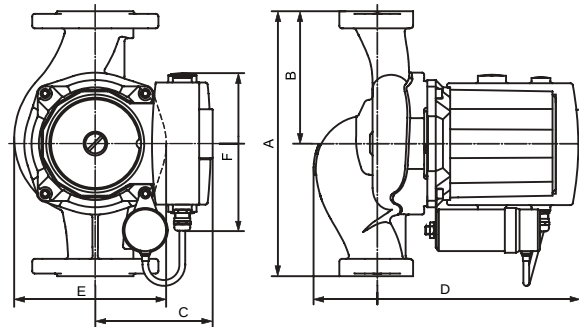

Drawing 1

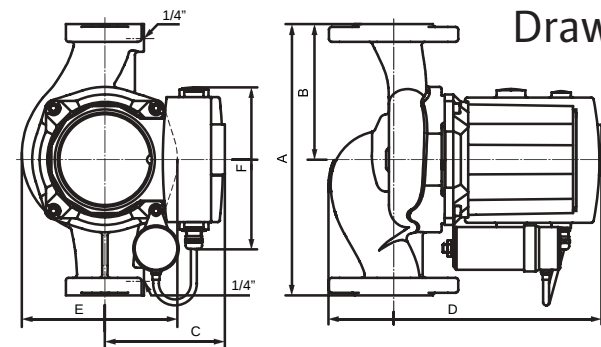


Drawing 3

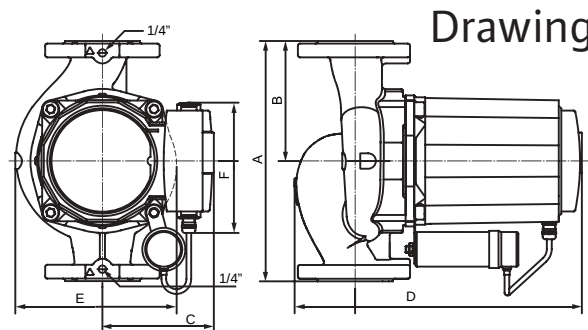


Drawing 5

Model	Pump Dimensions												Weight Approx. Net				Dwg #
	A	A	B	B	C	C	D	D	E	E	F	F	Cast Iron		Bronze		
	In	mm	In	mm	In	mm	In	mm	In	mm	In	mm	Lbs	Kg	Lbs	Kg	
1.25 x 15	6 1/2	165	3 1/4	82.5	4 3/16	106	8 15/16	227	4 13/16	121.5	6 1/16	154	14	6	n/a	n/a	1
1.25 x 25	6 1/2	165	3 1/4	82.5	4 3/16	106	8 15/16	227	4 13/16	121.5	6 1/16	154	14	6	n/a	n/a	1
1.25 x 35	8 1/2	216	4 1/4	108	4 7/16	113	9 1/4	235.5	5 1/16	129	6 1/16	154	18	8	n/a	n/a	1
1.5 x 20	10	254	5	127	4 7/16	113	10 1/16	256	5 3/4	146	5 15/16	151	20	9	22	10	3
1.5 x 30	10	254	5	127	4 3/4	120	11 9/16	293	6 5/8	169	5 15/16	151	29	13	31	14	3
1.5 x 40	10	254	5	127	5 1/8	130	13 1/16	331	7 5/16	185	5 15/16	151	41	19	44	20	3
1.5 x 50	10	254	5	127	5 1/8	130	13 1/16	331	7 5/16	185	6 1/16	154	41	19	44	20	3
1.5 x 60	10	254	5	127	5 1/8	130	13 1/16	331	7 5/16	185	6 1/16	154	46	21	49	22	3
2.0 x 25	11	279	5 1/2	139.5	4 3/4	120	12 1/16	307	6 9/16	167	5 15/16	151	34	15	37	17	5
2.0 x 35	11	279	5 1/2	139.5	5 1/8	130	13 1/8	333	7 3/8	187	5 15/16	151	43	20	47	21	5
2.0 x 40	11	279	5 1/2	139.5	5 1/8	130	13 1/8	333	7 3/8	187	6 1/16	154	43	20	47	21	5
2.0 x 50	13 1/2	343	6 3/4	171.5	5 1/8	130	14 7/8	378	7 11/16	195	6 1/16	154	51	23	55	25	5

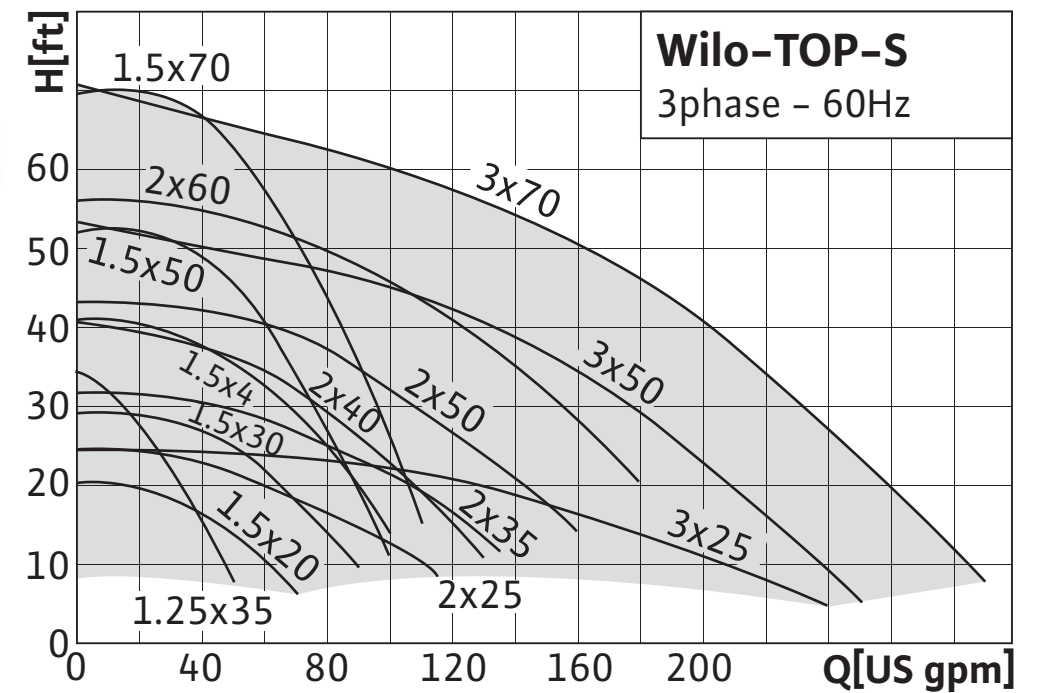


Two Speed
Wet Rotor Circulator


Top S Three Phase Circulator (208/230v, 460v, 575v)

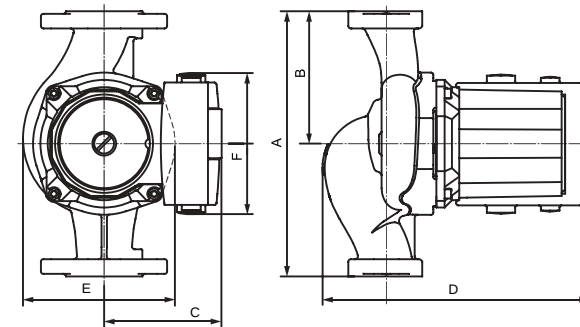

Drawing 2

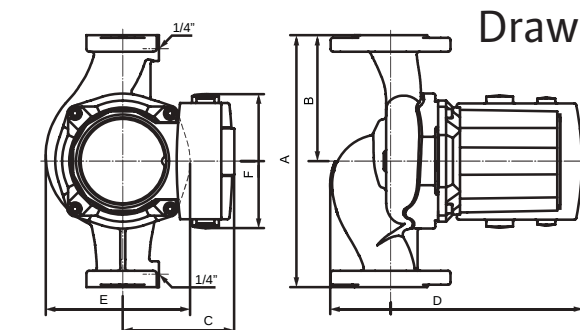

Drawing 4

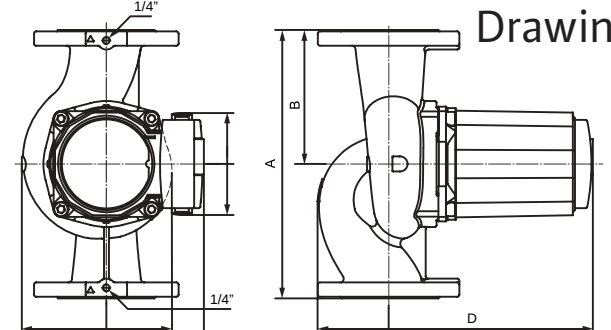

Drawing 6

Model	Pump Dimensions												Weight Approx. Net				Dwg #
	A	A	B	B	C	C	D	D	E	E	F	F	Cast Iron		Bronze		
	In	mm	In	mm	In	mm	In	mm	In	mm	In	mm	Lbs	Kg	Lbs	Kg	
1.25 x 35	10	254	5	127	4 3/4	120	11 1/2	293	6 5/8	169	5 5/16	135	18	8	n/a	n/a	2
1.5 x 20	10	254	5	127	4 7/16	113	10 1/16	256	5 3/4	146	5 5/16	135	20	9	22	10	4
1.5 x 30	10	254	5	127	4 3/4	120	11 9/16	293	6 5/8	169	5 5/16	135	27	12	29	13	4
1.5 x 40	10	254	5	127	5 1/8	130	13 1/16	331	7 5/16	185	5 5/16	135	40	18	43	20	4
1.5 x 50	10	254	5	127	5 1/8	130	13 1/16	331	7 5/16	185	5 5/16	135	45	20	48	22	4
1.5 x 70	10	254	5	127	5 1/8	130	13 1/16	331	7 5/16	185	5 1/2	140	45	20	48	22	4
2.0 x 25	11	279	5 1/2	139.5	4 3/4	120	12 1/16	307	6 9/16	167	5 5/16	135	32	15	35	16	6
2.0 x 35	11	279	5 1/2	139.5	5 1/8	130	13 1/8	333	7 3/8	187	5 5/16	135	42	19	46	21	6
2.0 x 40	11	279	5 1/2	139.5	5 1/8	130	13 1/8	333	7 3/8	187	5 1/2	140	42	19	46	21	6
2.0 x 50	13 1/2	343	6 3/4	171.5	5 1/8	130	14 7/8	378	7 11/16	195	5 5/16	135	56	26	60	27	6
2.0 x 60	13 1/2	343	6 3/4	171.5	5 1/8	130	14 7/8	378	7 11/16	195	5 1/2	140	56	26	60	27	6
3.0 x 25	14	356	7	178	6 1/16	154	14 3/8	365	7 13/16	199	5 5/16	135	62	28	69	31	6
3.0 x 50	14	356	7	178	6 1/16	154	19 5/16	491	8 15/16	227	5 5/16	135	95	43	103	47	6
3.0 x 70	14	356	7	178	6 1/16	154	19 5/16	491	8 15/16	227	5 1/2	140	97	44	106	48	6

WILO Top S Commercial Wet Rotor Circulators

WILO Top S

- No Mechanical Seal
- Quiet Low Maintenance Wet rotor Circulator
- Two Speed Operation on all Voltages
- Automatically Vented
- Cataphoresis Coating Prevents Corrosion
- Sturdy Cast Aluminum Electrical Box
- Short Flange to Flange Dimension
- Most Extensive Wet Rotor Line in the Industry!

Model Number Designation



TOP S 2-25 B

- S** = Multiple Speed
2 = Flange Size (inches)
25 = Shutoff Head approx. (ft)
B = Bronze Volute
(Cast Iron if no letter)

WILO USA LLC
1290 N 25th Ave.
Melrose Park, IL
60160
1-866-WILO-USA
www.WILO-USA.com

WILO Canada Inc.
Bay #7 - 2915 10th Ave. NE
Calgary, Alberta
T2A 5L4
1-866-WILO-CDN
www.WILO-CANADA.com



Pumpen Intelligenz.