VERSA'LARM™- Tank Alarm

Leading Edge Design





Detect Pump Failures with Early Warning

A standard Versa'larm™
- Tank Alarm includes a
Versa'larm alarm panel
and a Unimax™Mechanical Control
Switch

Notification of Trouble While You're Away from Home

Receive immediate notification of threatening water levels by connecting an Auto Dialer to the Versa'larm. When an alarm occurs, the Auto Dialer will call four contact numbers which can include standard phones, cell phones or pagers.

Works During power Outages

Install standard 9 volt batteries to the Versa'larm and Auto Dialer to ensure that the complete system will operate during power outages or accidental unplugging of the unit.

Expand at Any Time

Once the standard Versa'larm-Tank Alarm is installed, you can add accessories and create a total "Home Protection System."

- ► Add up to six WaterSpottersTM for complete property protection.
- P Add the low temperature switch option with an Auto Dialer and get Furnace Failure notification while away from home to prevent freezing water pipes and expensive, messy clean-ups.




Stand-Alone Alarm


Install the standard Versa'larmTM-Tank Alarm to fit your immediate needs

(Includes one Versa'larm TM and one Unimax TM -Mechanical Control Switch) Expand the Tank Alarm at any time by adding accessories.

Typical Applications:

A standard alarm may be all that you need. If you want additional coverage – simply add accessories for customized protection.



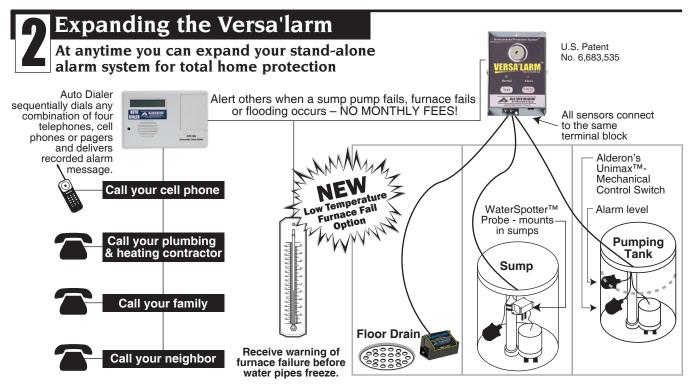



VERSA'LARM™- Tank Alarm

Specifications



Unimax™ Float

Electrical

4 amps, 120/230VAC

Operating Temperature 0-140 F

Cable

SJOOW-flexible, 18 gauge, water resistant, rubber (CPE)

Float Housing


High impact PVC

Switch Arrangement

Single pole, single throw

Switching Differential

10 degrees total



Features

Patented Mechanical Design

Mechanically activated snap action contacts

PVC Float Housing

Excellent corrosion resistance and withstands high impacts

Heavy Duty Cable

Extra flexible 18 gauge, 2 conductor cable

Omni-Directional

Not sensitive to rotation or turbulence

UL Listed / 3-Year Warrantv

Guaranteed safety and performance

VERSA'LARM™

Primary Power 120 VAC, 60 Hz

Secondary Power Class 2, 9 VDC, 200 mA

Auxiliary Contacts

Single pole, double throw Class 2, 24 VDC/24 VAC (50/60Hz), 500 mA maximum

Battery


Standard 9 VDC (not included)

Buzzer

103 db @ 2 ft

Switch

9 VDC, 200 mA minimum (Signaling device) Single pole, single throw



Features

Flashing Light and Buzzer

Excellent audio/visual in poor conditions

Test/Silence Switches. **Automatic Buzzer Reset**

Guarantees alarm

Battery Back-up

Protection during power outages

Alarm Auxiliary Contacts

Connect to Auto Dialers Remote alarms

Connect Up to Six WaterSpotter[™] Sensors

Flexibility for zone protection

Type 1 Enclosure with **External Mounting Flange**

Mounts in minutes

Green Normal Light

Indicates power and alarm status

UL Listed/3-Year Warranty

Guaranteed safety and performance

Order Numbers

Part Number	Description	VERSA LARM A HARREN Versa Tarm	Unimax™ Mechanical Float Switch	WaterSpotter [™]	WaterSpotter™ Probe	© San and the san	Auto Dialer
7001	Tank Alarm	20100101111	Tiour outron	arator opottor	Traceropottor From	Turnuoo run	Auto Biaioi
7001	(Versa'larm™ with Unimax™- Mechanical Control Switch)	X	X				
Accessori	es (Expanded Applications)	•					
7008	WaterSpotter™ (Flood Sensor)			Х			
7009	WaterSpotter™ Probe (Sump Sensor)				Х		
7018	Low Temperature Sensor (Need to order 7006 or 7019 also)					Х	
7006	Auto Dialer: 1 common message used for all sensors						Х
7019	Auto Dialer: 2 different messages, one for water sensors and one for furnace fail						х



Leading Edge Control Products

L1003-Rev.B