

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

THE PRO PAK 53

PREASSEMBLED SUMP PUMP SYSTEM WITH BATTERY BACKUP

MODEL 507 - 12V DC BATTERY BACKUP SYSTEM WITH 115V AC POWERED SUMP PUMP MODEL M53

System Includes:

- Primary pump, automatic Model 53, 1/3 HP, 115V, passes 1/2" spherical solids
- Basement Sentry, Model 507, 12 Volt DC backup system with DC pump, check valve, float switch and piping
- Plumbed in 1 1/2" Sch 40 PVC pipe

Features and Benefits:

- 3 year warranty on entire system
- Comes fully assembled and ready to install in your clear water sump
- Automatic operation
- Primary pump delivers 43 GPM and backup pump delivers up to 23 GPM @ 5 ft. of head
- Will provide 7 1/2 hours of continuous pumping on a fully charged battery
- Extra protection when the primary AC pump fails due to power outages
- Battery burn out and overcharge protection
- Self contained 10 amp battery recharger
- Fully solid state automatic controller with alarm, light indicator and warning system
- Engineered glass-filled thermoplastic vortex impeller
- Lockable battery box
- Same great proven products
- Factory assembled
- 12V deep cycle marine battery not included. Zoeller battery recommended but not required to qualify for 3 year warranty. See FM1311 for min. battery requirements.



Product may not be exactly as shown.

TOTAL DYNAMIC HEAD/FLOW PER MINUTE EFFLUENT AND DEWATERING


MODEL		53	
Feet	Meters	Gal.	Liters
5	1.5	43	163
10	3.0	34	129
15	4.6	19	72
Shut-off Head:		19.25 ft.(5.9m)	

009897b


TOTAL DYNAMIC HEAD/FLOW PER MINUTE DEWATERING ONLY

MODEL		507	
Feet	Meters	Gal.	Liters
5	1.5	23	87
10	3.0	15	57
15	4.6	5	19
Shut-off Head:		17.5 ft.(5.3m)	

009926b

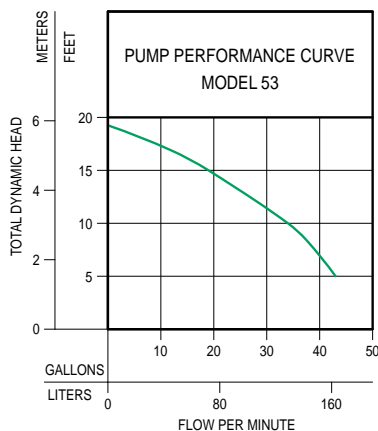

009897a

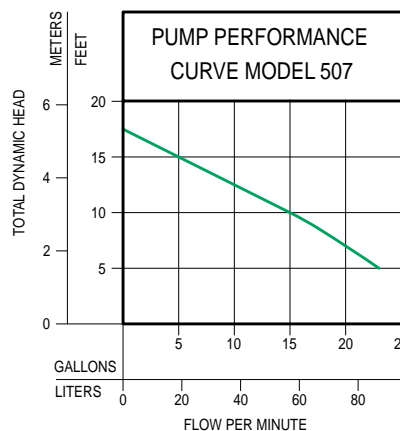

009926a

THE PRO PAK 49

PREASSEMBLED SUMP PUMP SYSTEM WITH BATTERY BACKUP

MODEL 507 - 12V DC BATTERY BACKUP SYSTEM WITH 115V AC POWERED SUMP PUMP MODEL WM49

System Includes:

- Primary pump, automatic Model 49, ¼ HP, 115V, passes 3/8" spherical solids
- Basement Sentry, Model 507, 12 Volt DC backup system with DC pump, check valve, float switch and piping
- Plumbed in 1½" Sch 40 PVC pipe

Features and Benefits:

- 3 year warranty on entire system
- Comes fully assembled and ready to install in your clear water sump
- Automatic operation
- Primary pump delivers 32 GPM and backup pump delivers up to 23 GPM @ 5 ft. of head
- Will provide 7½ hours of continuous pumping on a fully charged battery
- Extra protection when the primary AC pump fails due to power outages
- Battery burn out and overcharge protection
- Self contained 10 amp battery recharger
- Fully solid state automatic controller with alarm, light indicator and warning system
- Engineered glass-filled thermoplastic vortex impeller
- Lockable battery box
- Same great proven products
- Factory assembled
- 12V deep cycle marine battery not included. Zoeller battery recommended but not required to qualify for 3 year warranty. See FM1311 for min. battery requirements.



TOTAL DYNAMIC HEAD/FLOW PER MINUTE DEWATERING ONLY


MODEL		49	
Feet	Meters	Gal.	Liters
5	1.5	32	121
10	3.0	25	95
15	4.6	10	38
Shut-off Head:		18 ft. (5.5m)	

018141


TOTAL DYNAMIC HEAD/FLOW PER MINUTE DEWATERING ONLY

MODEL		507	
Feet	Meters	Gal.	Liters
5	1.5	23	87
10	3.0	15	57
15	4.6	5	19
Shut-off Head:		17.5 ft. (5.3m)	

009926b

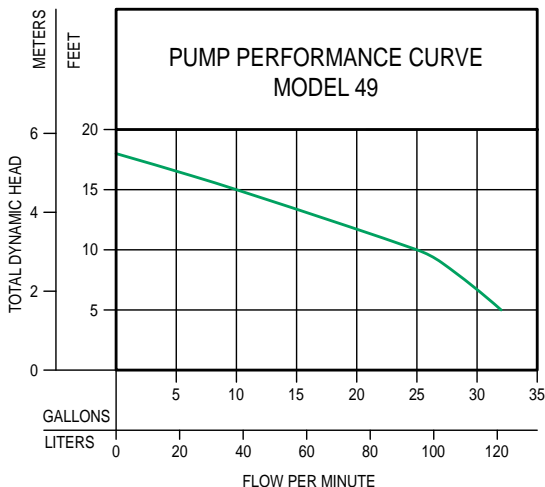

018141

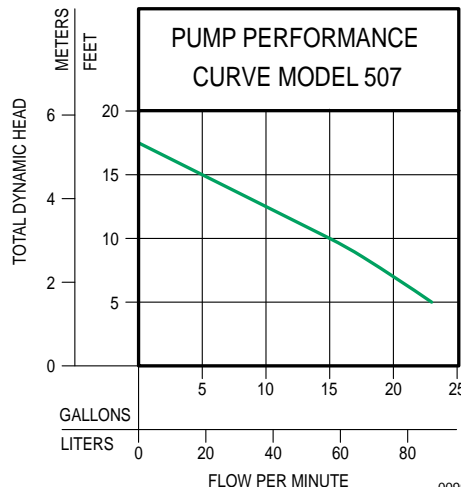

009926a